


nikpol™



TIOMOS FLAP HINGE NIGHT

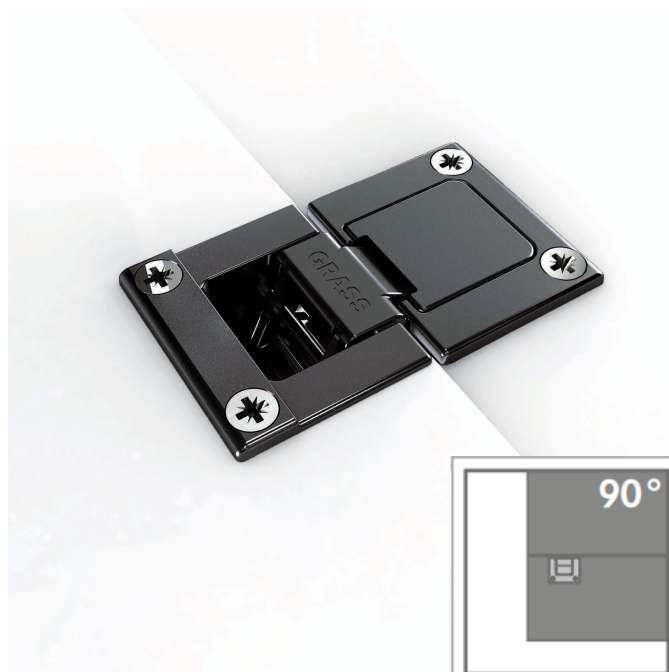

- Modern design
- 90° opening angle
- For flap thicknesses of up to 21 mm
- Narrow gaps between door and cabinet
- Large overlay of up to 19 mm
- 12 mm cup depth
- 3-dimensional adjustment
- Very suitable for combining with the Kinvaro D flap stays

Door overlay	View		Material		For screw fixing	Item no.
			Cup	Arm		
Overlying			Zamak, night	Zamak, night	F053139677	

COVER CAPS

	Description	Item no.
	Hinge arm cover cap, steel, night	F053139683

LINEAR ADAPTER PLATES


	Description	Item no.
	Linear adapter plate, 1.5 mm, night	F053139684

INSTALLATION INFORMATION


All dimensions in millimetres

Overlay, without linear adapter plate	Overlay, with linear adapter plate (1.5 mm, 1x)	Overlay, with linear adapter plate (1.5 mm, 2x)	Half overlay, with linear adapter plate (7 mm)																																																																																
<table border="1"> <thead> <tr> <th colspan="2">Minimum gap width (F)</th> </tr> </thead> <tbody> <tr><td>22</td><td>1</td></tr> <tr><td>23</td><td>1</td></tr> <tr><td>24</td><td>1</td></tr> <tr><td>25</td><td>1.5</td></tr> <tr><td>26</td><td>2.5</td></tr> <tr><td>27</td><td>3.5</td></tr> <tr><td>28</td><td>4.5</td></tr> <tr><td>29</td><td>5.5</td></tr> <tr><td>30</td><td>6.5</td></tr> </tbody> </table>	Minimum gap width (F)		22	1	23	1	24	1	25	1.5	26	2.5	27	3.5	28	4.5	29	5.5	30	6.5	<table border="1"> <thead> <tr> <th colspan="2">Minimum gap width (F)</th> </tr> </thead> <tbody> <tr><td>22</td><td>1</td></tr> <tr><td>23</td><td>1</td></tr> <tr><td>24</td><td>1</td></tr> <tr><td>25</td><td>1.5</td></tr> <tr><td>26</td><td>2.5</td></tr> <tr><td>27</td><td>3.5</td></tr> <tr><td>28</td><td>4.5</td></tr> <tr><td>29</td><td>5.5</td></tr> <tr><td>30</td><td>6.5</td></tr> </tbody> </table>	Minimum gap width (F)		22	1	23	1	24	1	25	1.5	26	2.5	27	3.5	28	4.5	29	5.5	30	6.5	<table border="1"> <thead> <tr> <th colspan="2">Minimum gap width (F)</th> </tr> </thead> <tbody> <tr><td>22</td><td>1</td></tr> <tr><td>23</td><td>1</td></tr> <tr><td>24</td><td>1</td></tr> <tr><td>25</td><td>1.5</td></tr> <tr><td>26</td><td>2.5</td></tr> <tr><td>27</td><td>3.5</td></tr> <tr><td>28</td><td>4.5</td></tr> <tr><td>29</td><td>5.5</td></tr> <tr><td>30</td><td>6.5</td></tr> </tbody> </table>	Minimum gap width (F)		22	1	23	1	24	1	25	1.5	26	2.5	27	3.5	28	4.5	29	5.5	30	6.5	<table border="1"> <thead> <tr> <th colspan="2">Minimum gap width (F)</th> </tr> </thead> <tbody> <tr><td>22</td><td>1</td></tr> <tr><td>23</td><td>1</td></tr> <tr><td>24</td><td>1</td></tr> <tr><td>25</td><td>1.5</td></tr> <tr><td>26</td><td>2.5</td></tr> <tr><td>27</td><td>3.5</td></tr> <tr><td>28</td><td>4.5</td></tr> <tr><td>29</td><td>5.5</td></tr> <tr><td>30</td><td>6.5</td></tr> </tbody> </table>	Minimum gap width (F)		22	1	23	1	24	1	25	1.5	26	2.5	27	3.5	28	4.5	29	5.5	30	6.5
Minimum gap width (F)																																																																																			
22	1																																																																																		
23	1																																																																																		
24	1																																																																																		
25	1.5																																																																																		
26	2.5																																																																																		
27	3.5																																																																																		
28	4.5																																																																																		
29	5.5																																																																																		
30	6.5																																																																																		
Minimum gap width (F)																																																																																			
22	1																																																																																		
23	1																																																																																		
24	1																																																																																		
25	1.5																																																																																		
26	2.5																																																																																		
27	3.5																																																																																		
28	4.5																																																																																		
29	5.5																																																																																		
30	6.5																																																																																		
Minimum gap width (F)																																																																																			
22	1																																																																																		
23	1																																																																																		
24	1																																																																																		
25	1.5																																																																																		
26	2.5																																																																																		
27	3.5																																																																																		
28	4.5																																																																																		
29	5.5																																																																																		
30	6.5																																																																																		
Minimum gap width (F)																																																																																			
22	1																																																																																		
23	1																																																																																		
24	1																																																																																		
25	1.5																																																																																		
26	2.5																																																																																		
27	3.5																																																																																		
28	4.5																																																																																		
29	5.5																																																																																		
30	6.5																																																																																		
Flap thickness (TS)	Flap thickness (TS)	Flap thickness (TS)	Flap thickness (TS)																																																																																


SIDE ADJUSTMENT

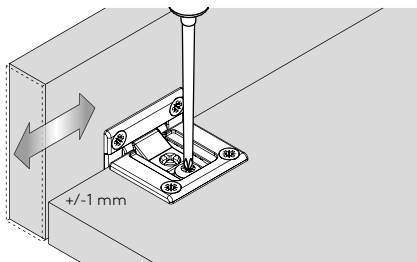


DEPTH ADJUSTMENT

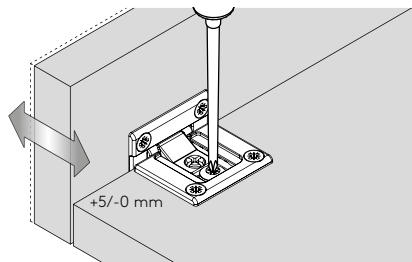

HEIGHT ADJUSTMENT

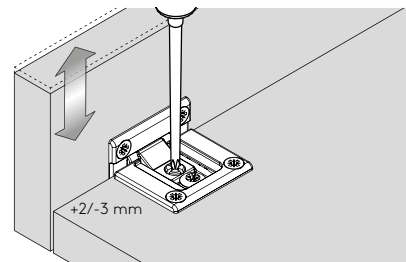

NUMBER OF HINGES

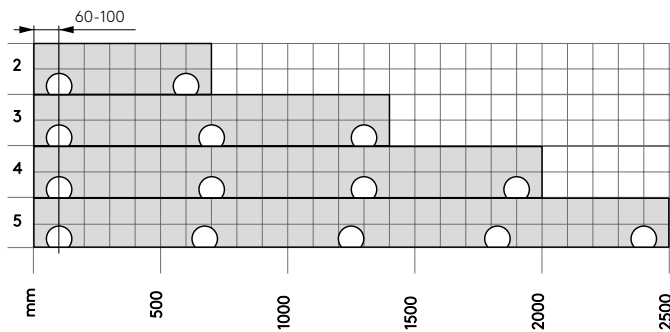


NOTES

Use chipboard screws $\varnothing 3.5 \times 15$ mm (not included in the delivery) to attach the hinge to the flap and base panel.

Hinge dimensions and reveal calculation with factory setting.

DRILLING PATTERNS

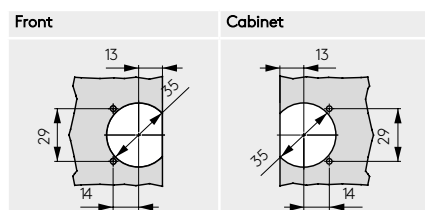

CUP DIMENSIONS

