nikpol

Furniture Pocket Door Mounting Instruction

Installation parameter

≤35kg

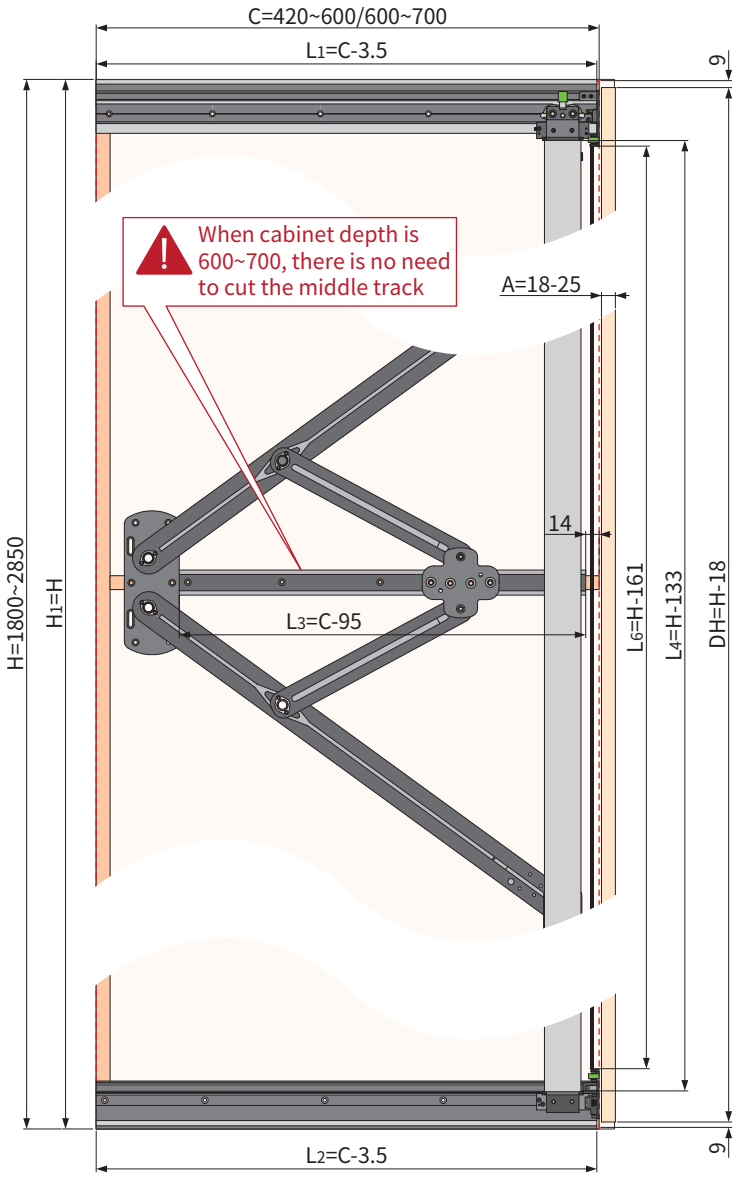

A	The thickness of the door panel	L_1	The length of the upper track
C	The depth of the cabinet	L_2	The length of the bottom track
C_1	The depth of the seal panel	L_3	The length of the middle track
H	The height of the cabinet	L_4	The height of the axis
H_1	The height of the seal panel	L_5	The length of the connected panel
DH	The height of the door panel	L_6	The length of the profile for weather strip & brusher
DW	The width of the door panel		
DW_1	The depth of the pocket	W	The width of the cabinet

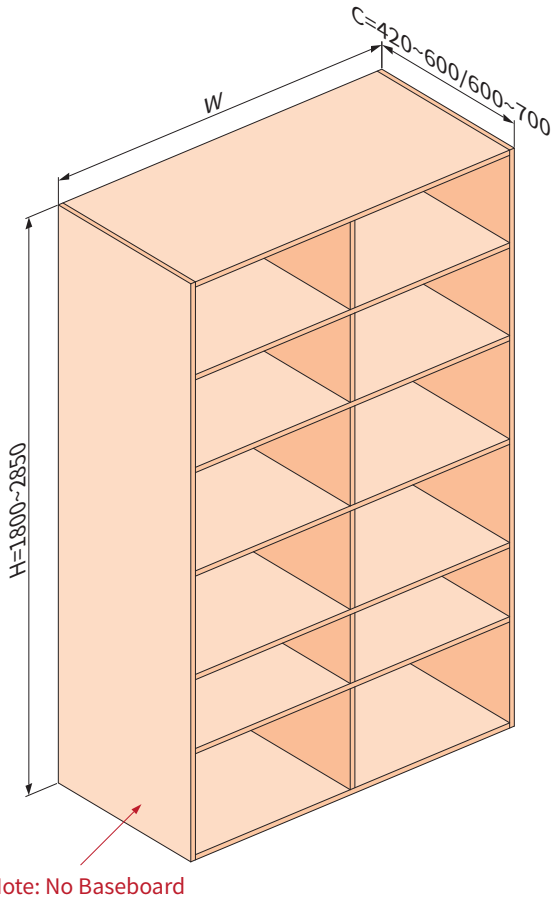

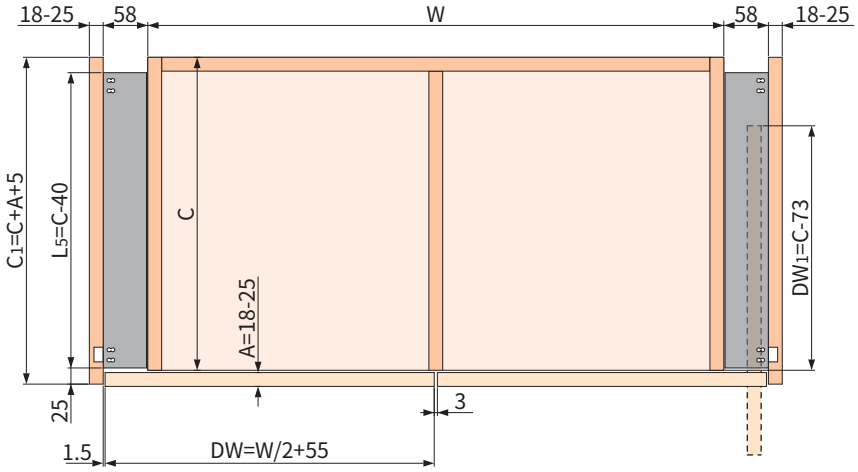

nikpol

Installation parameter

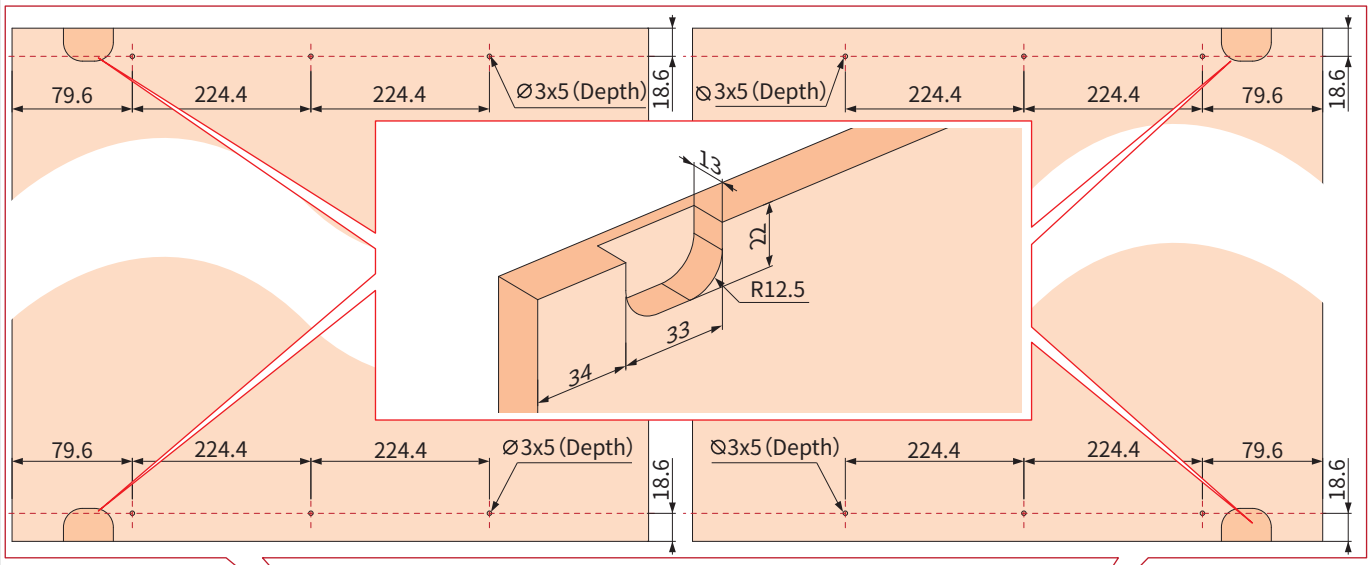

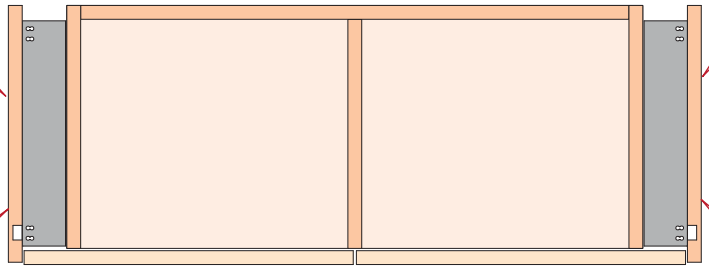

4 hinges for 1800-2000mm high cabinets
5 hinges for 2000-2850mm high cabinets

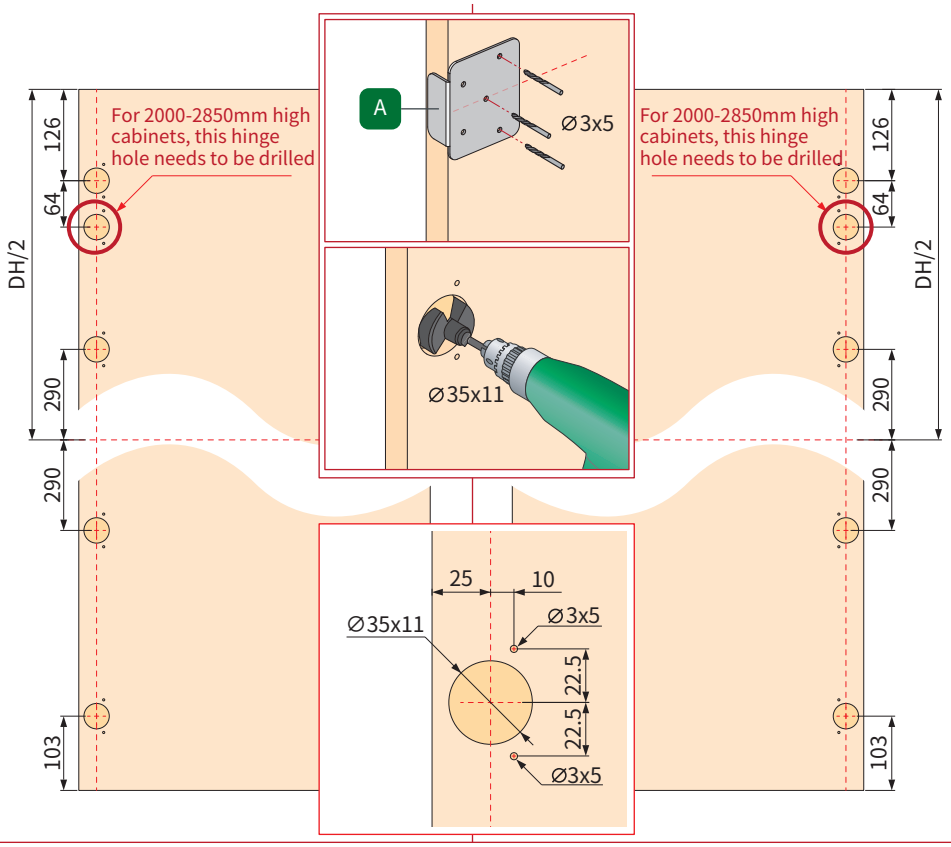

nikpol

Installation parameter

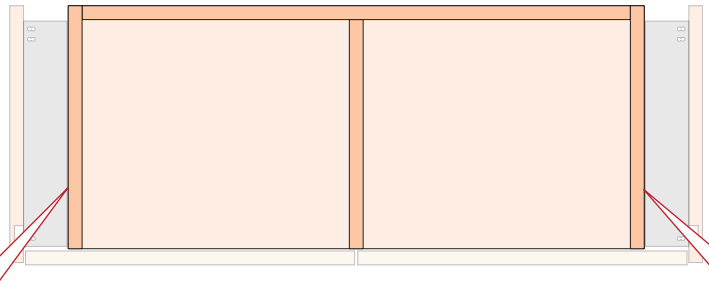

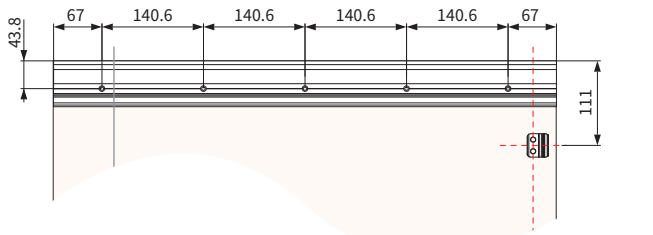

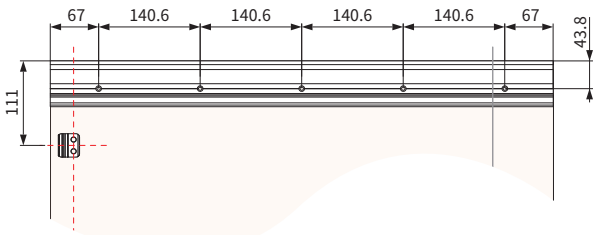

All screw holes ∅3x5(Depth)

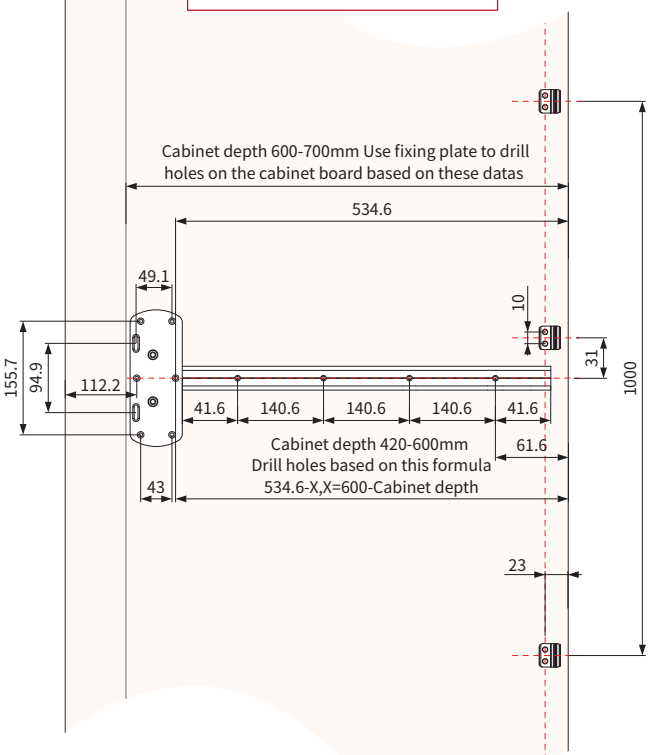

All screw holes ∅3x5(Depth)

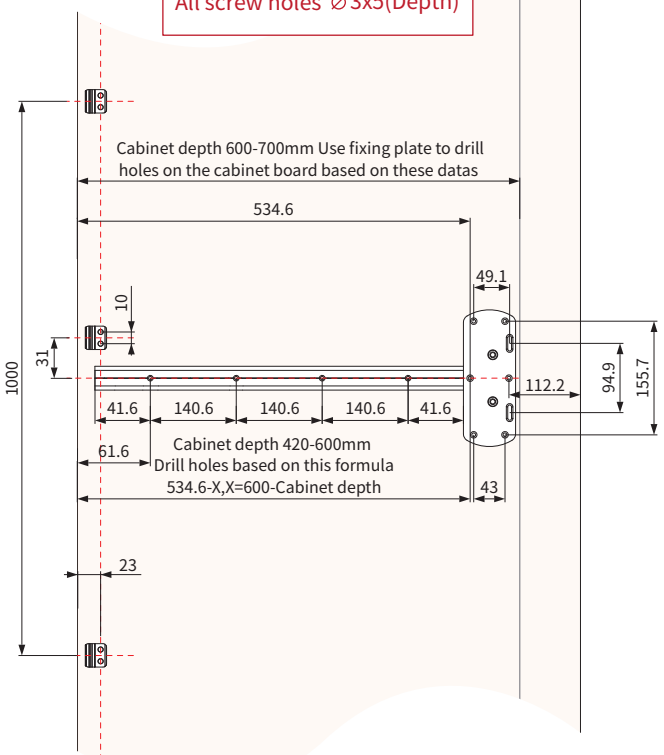

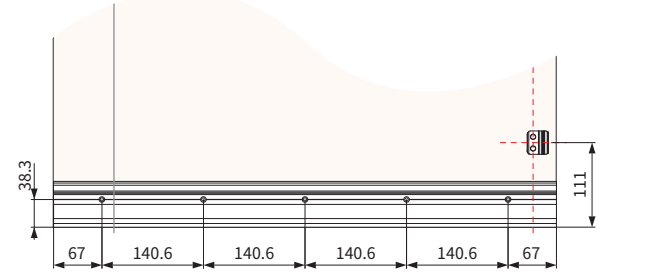

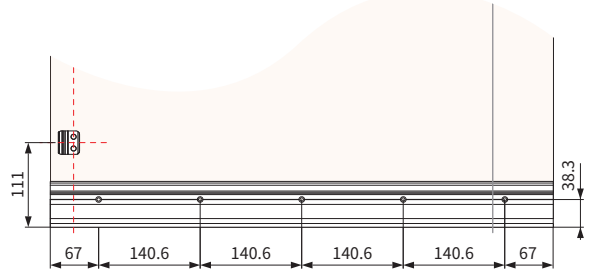

nikpol

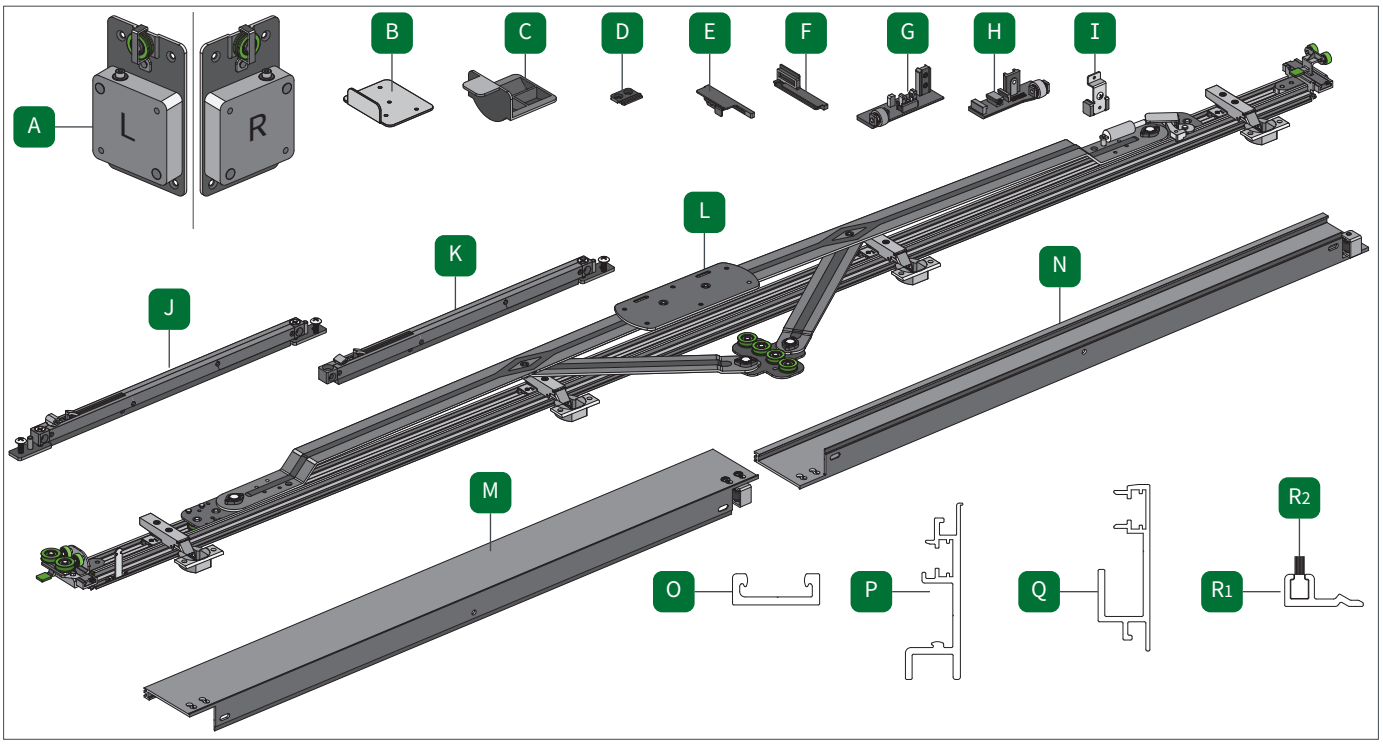

1 Cut profile

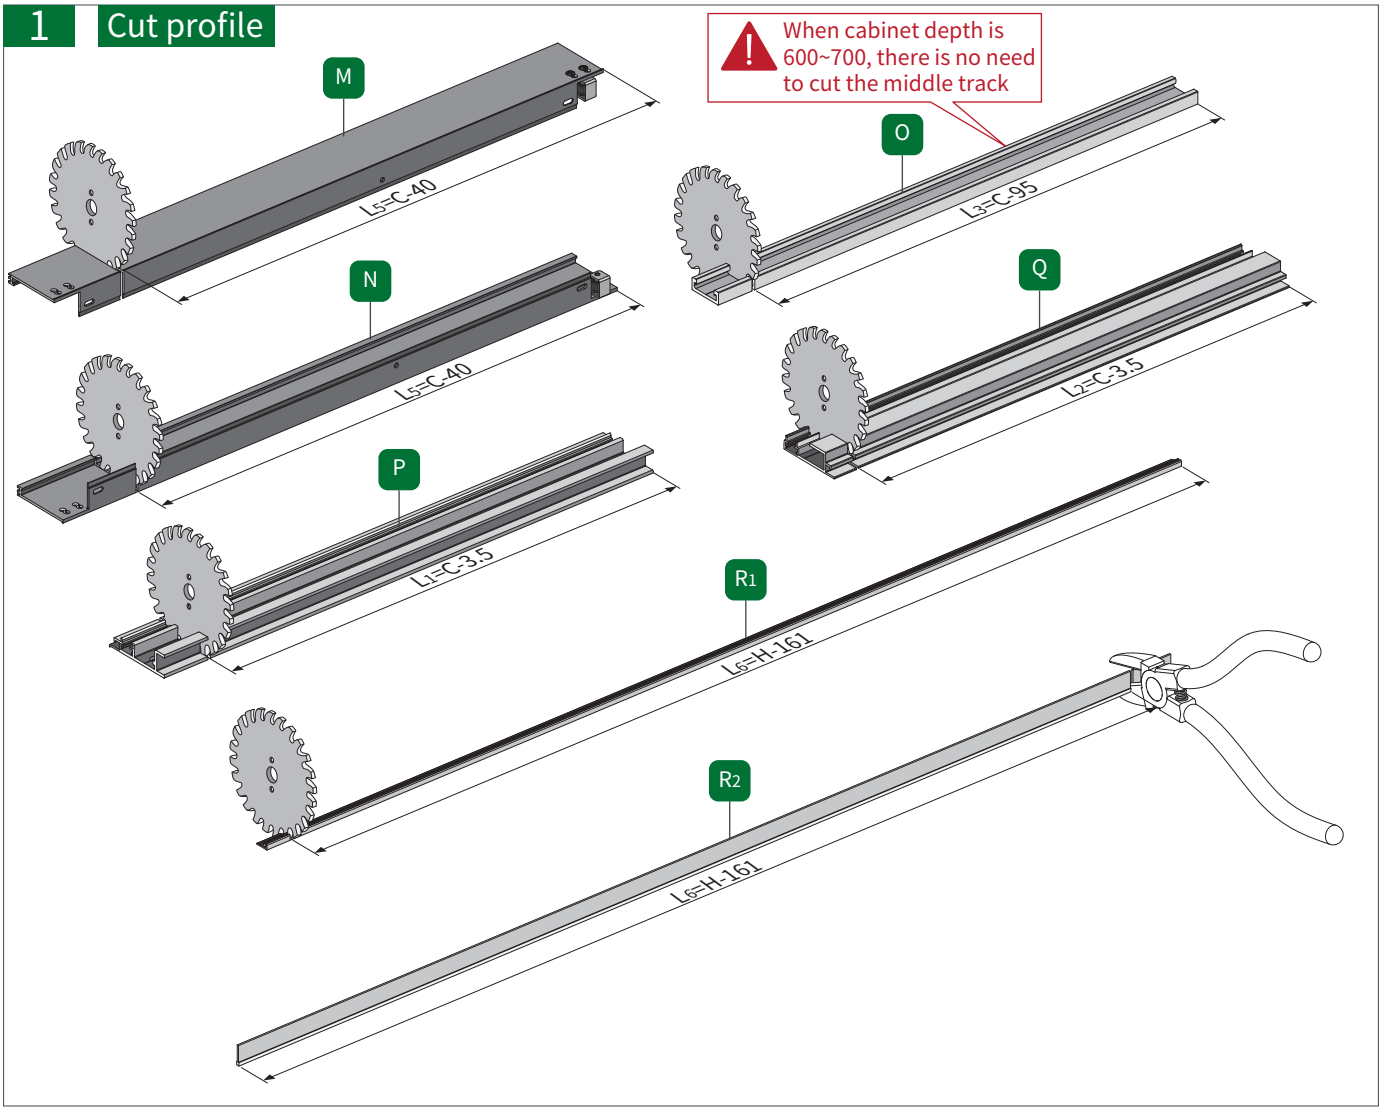

nikpol

2 Cutting Center shaft Install the middle rail

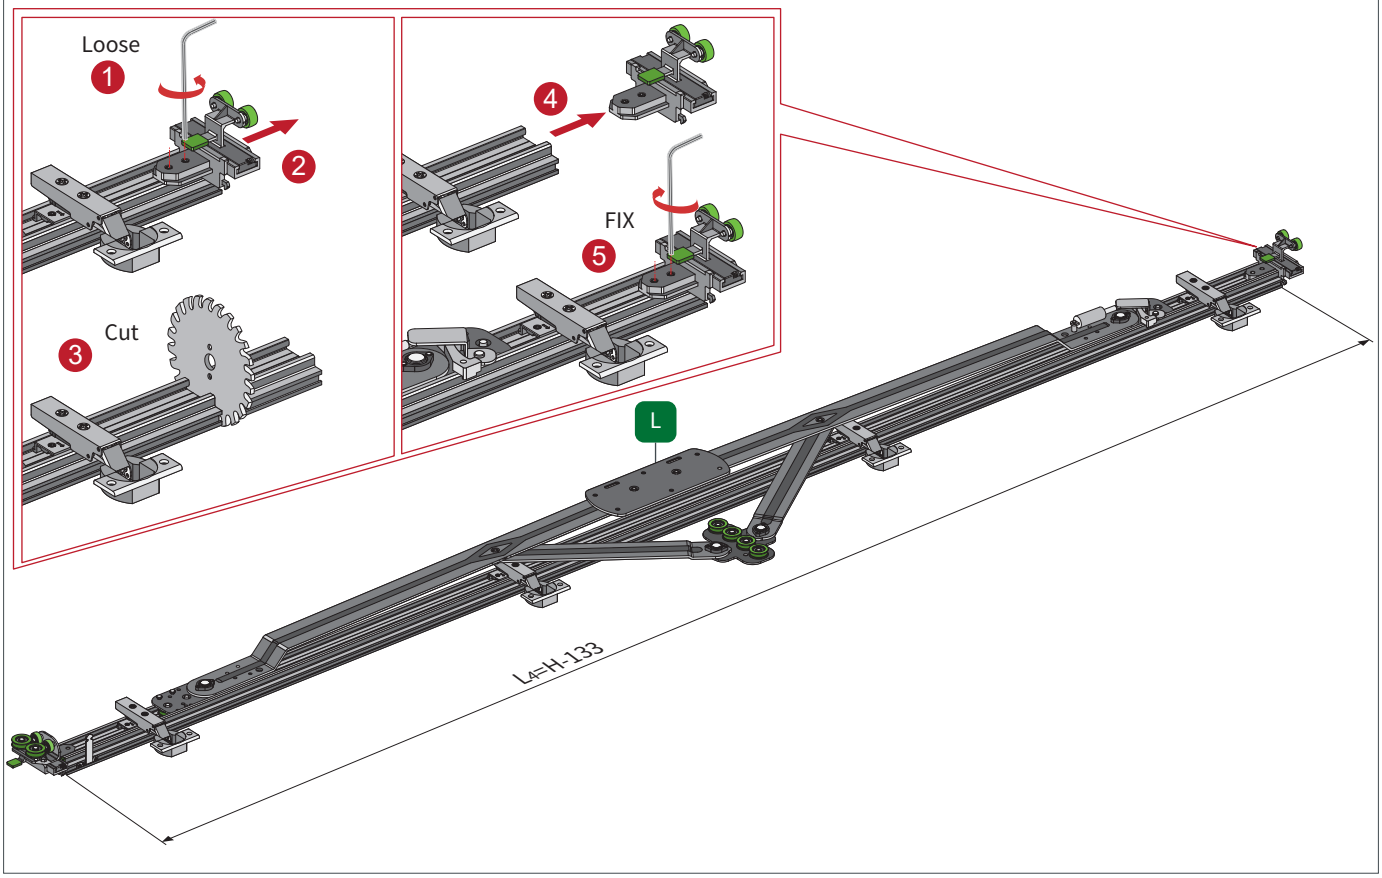

3 Install Upper Track & Lower Track

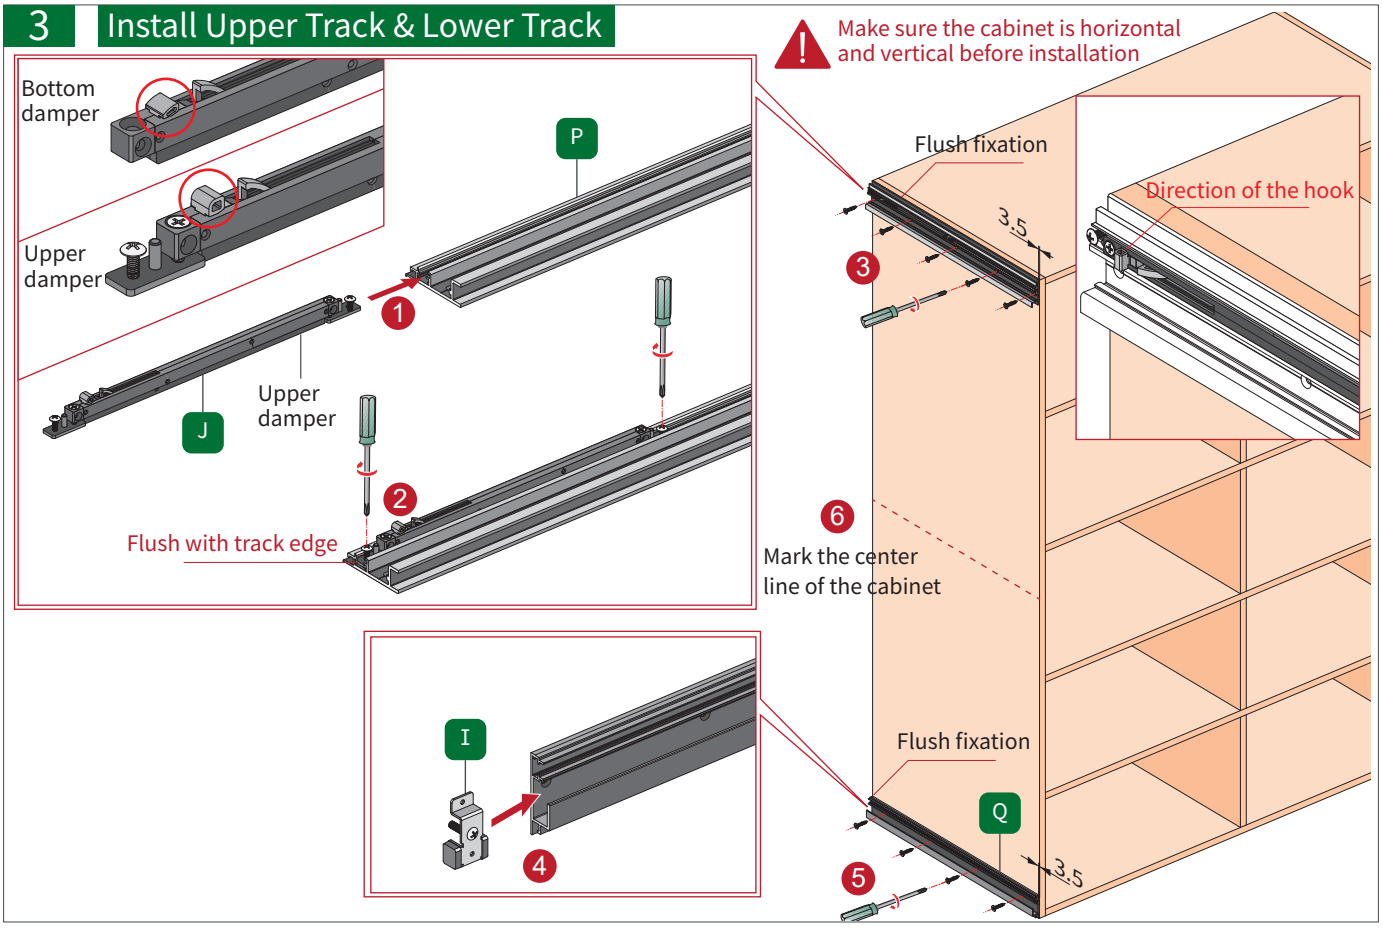

nikpol

4-1 Mounting bracket

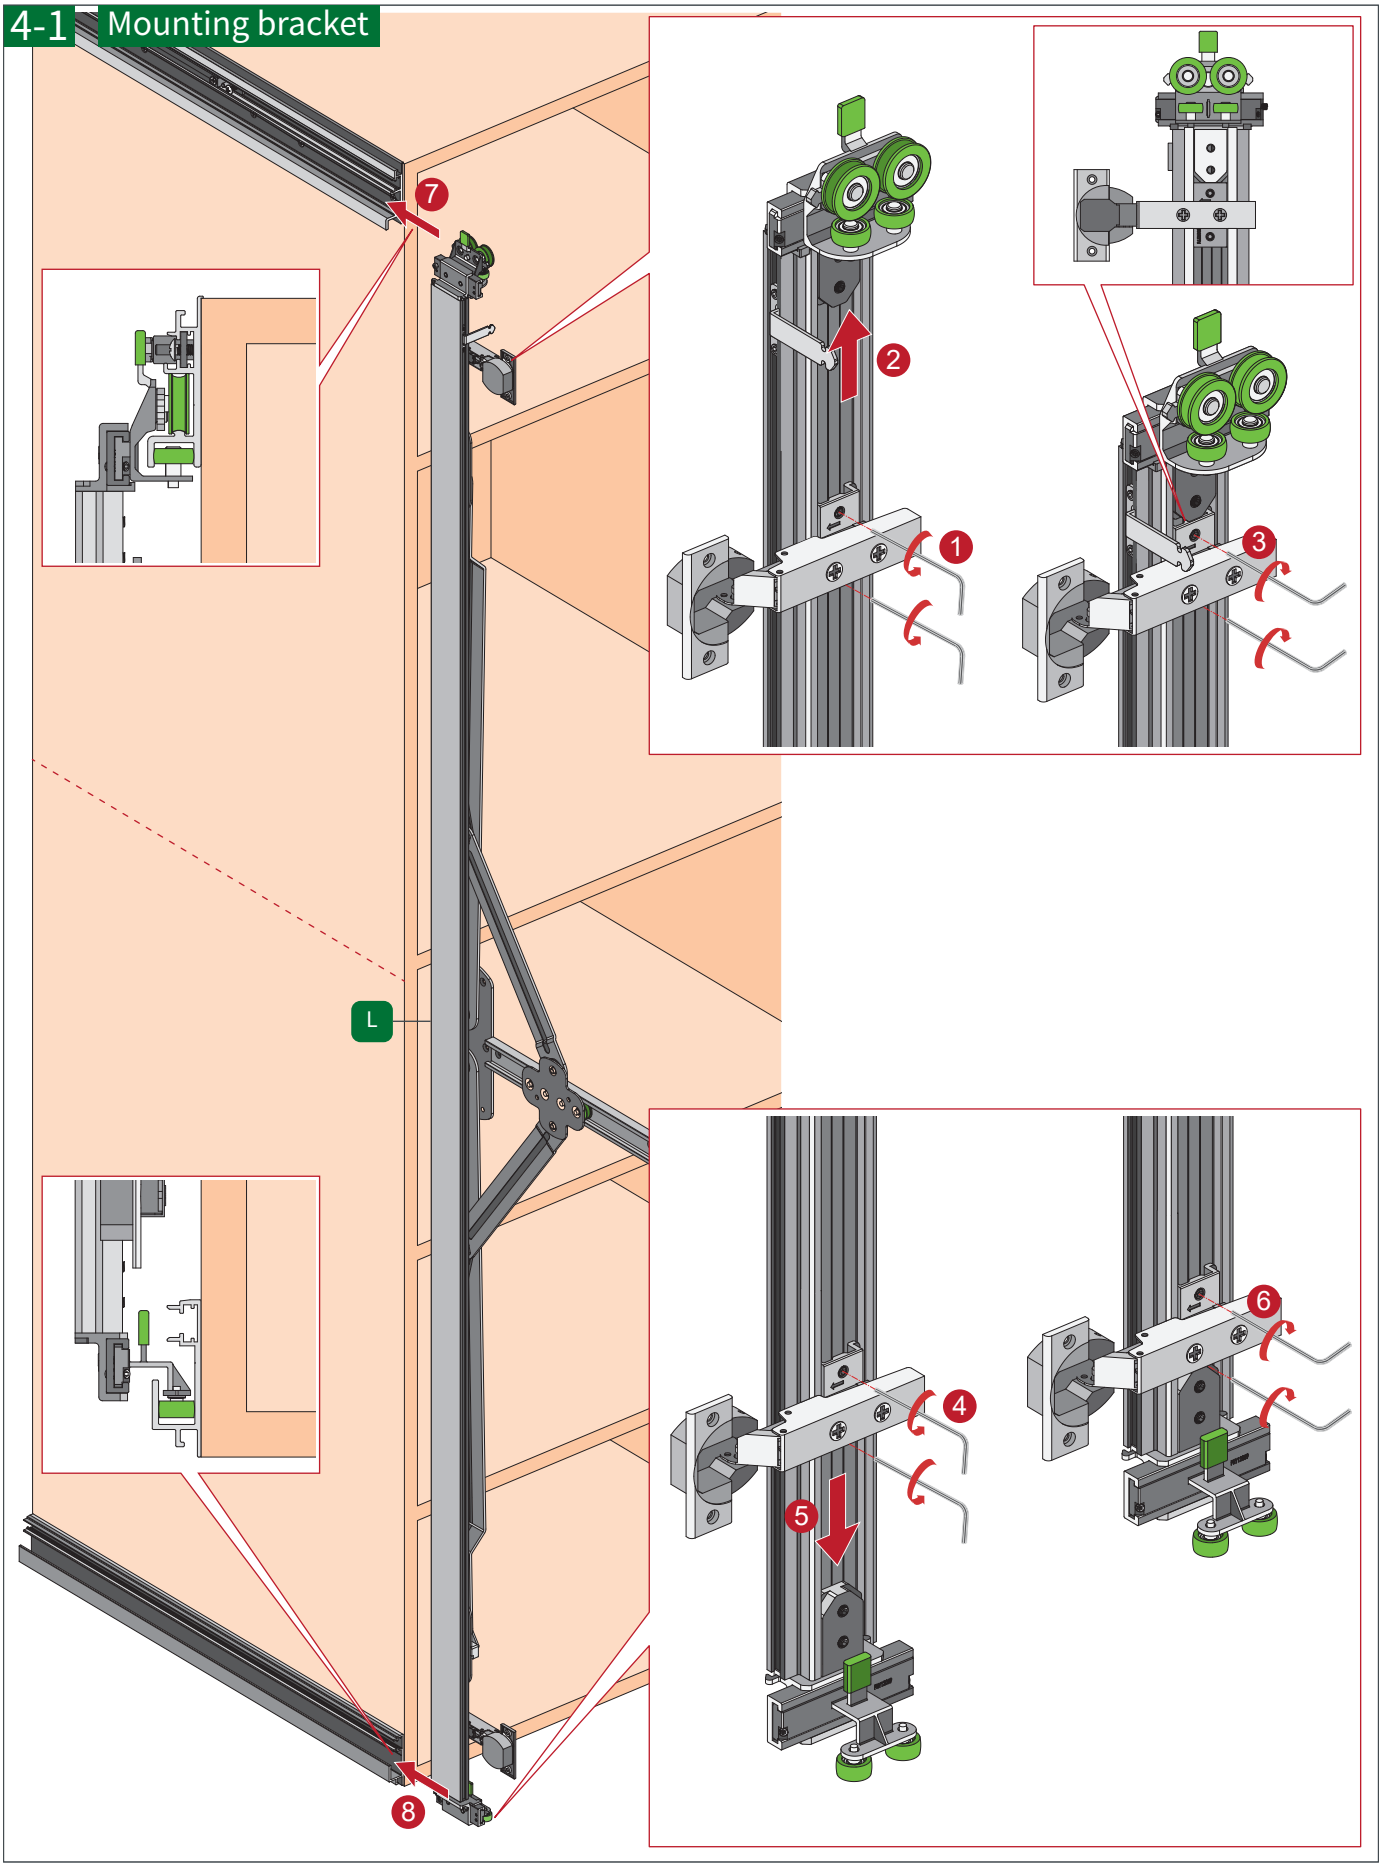

nikpol

4-2 Mounting bracket

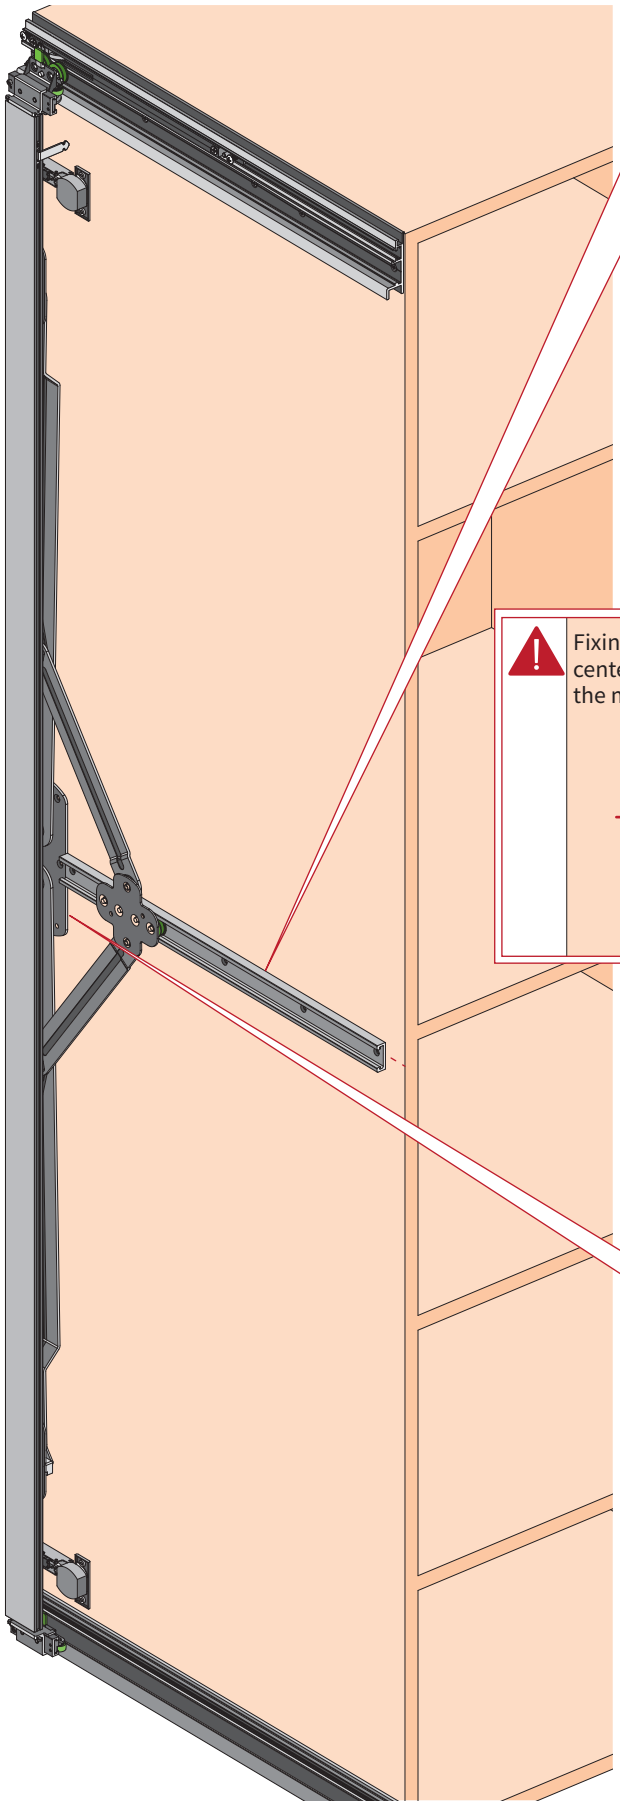

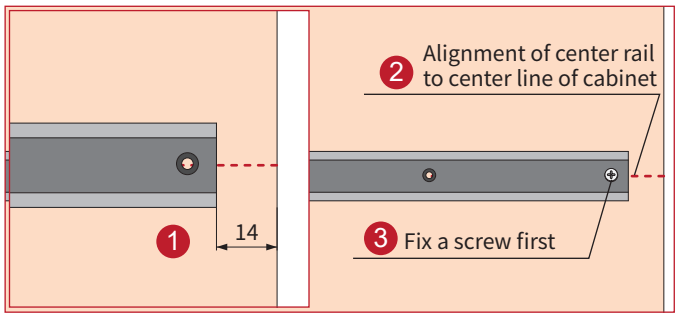

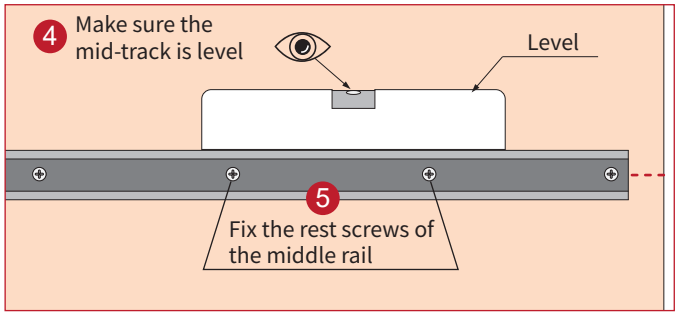

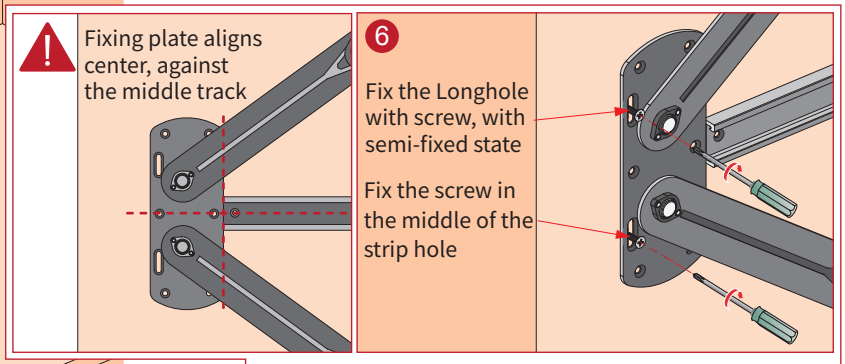

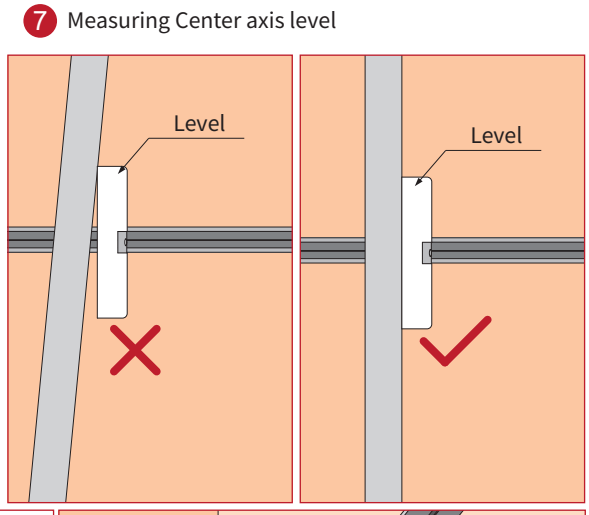

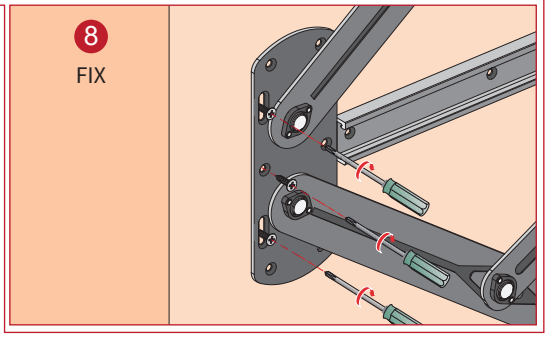

nikpol

5 Install the Upper & Lower Plug

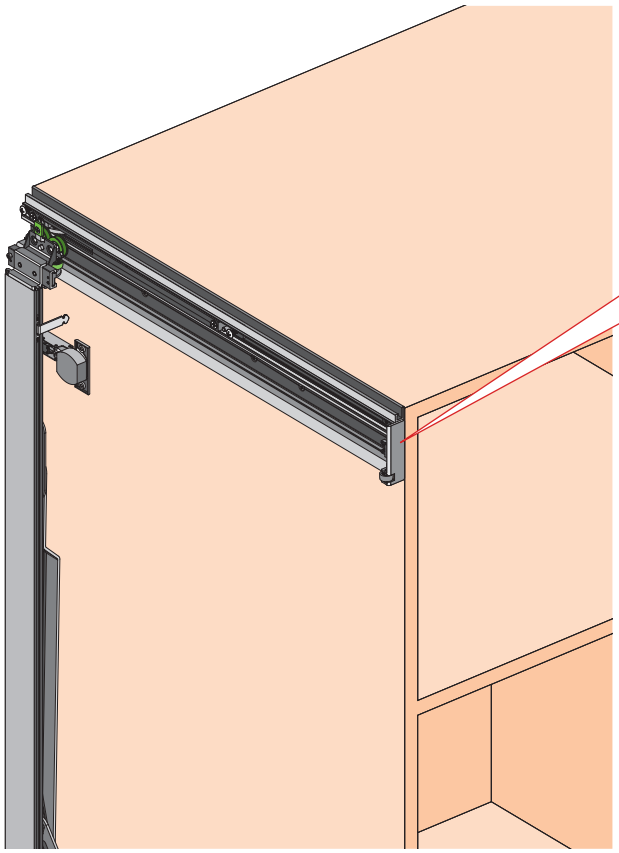

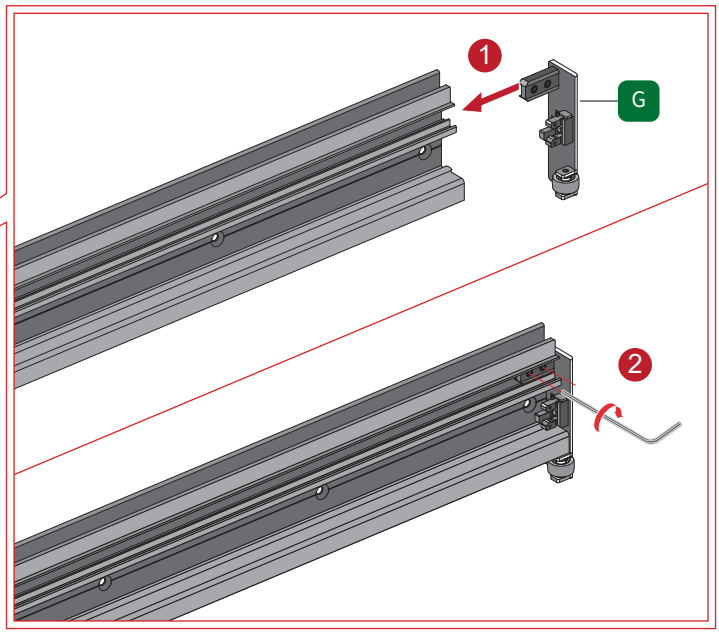

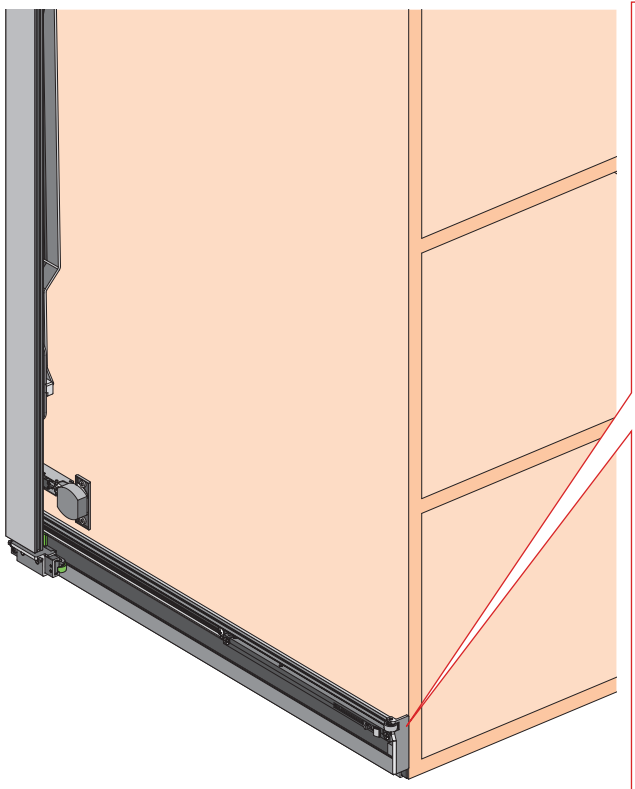

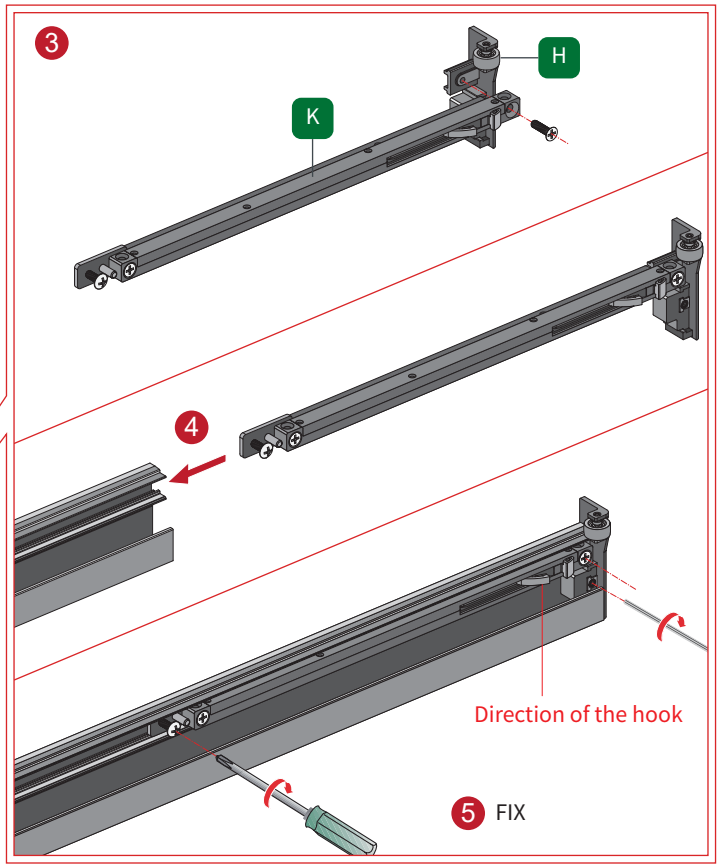

nikpol

6 Install plastic fixed part

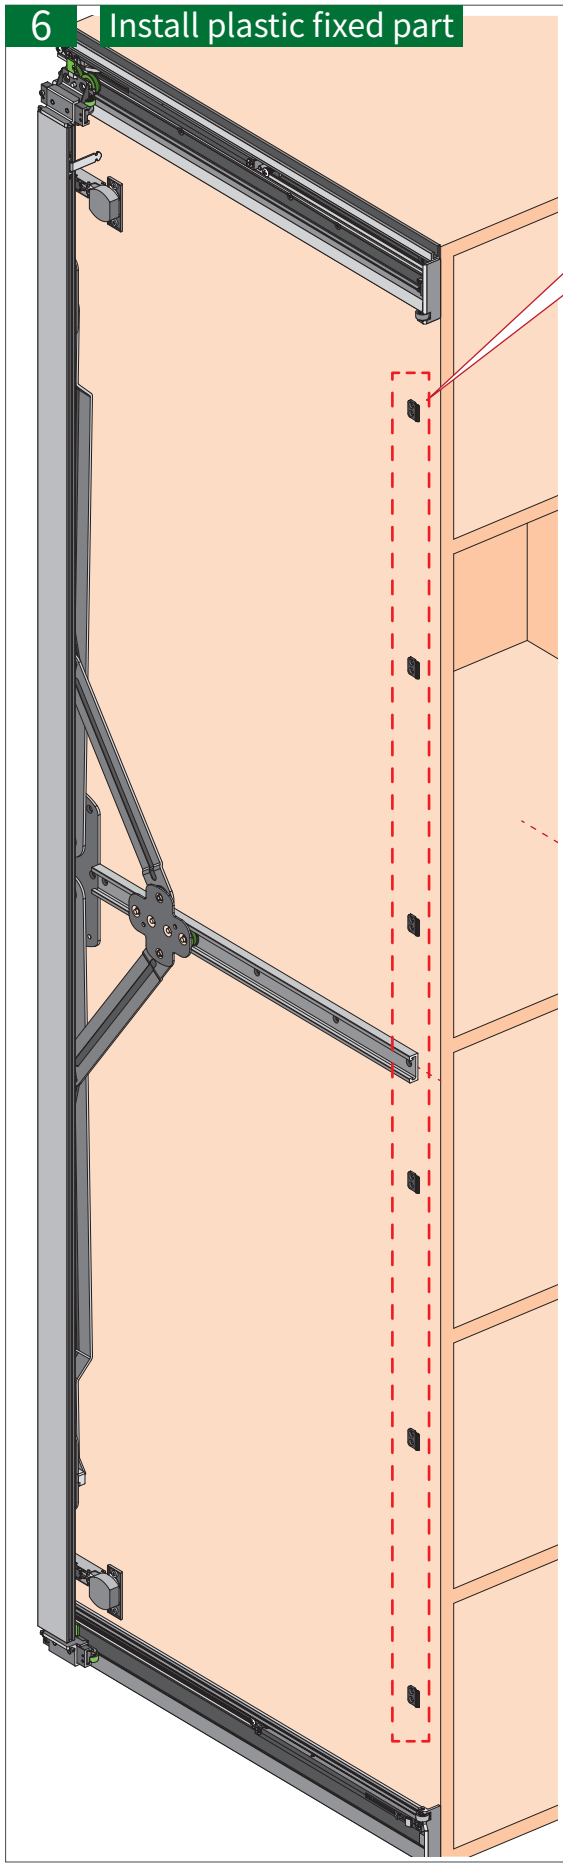

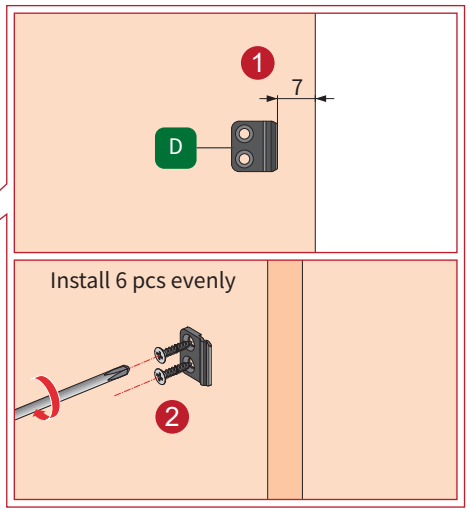

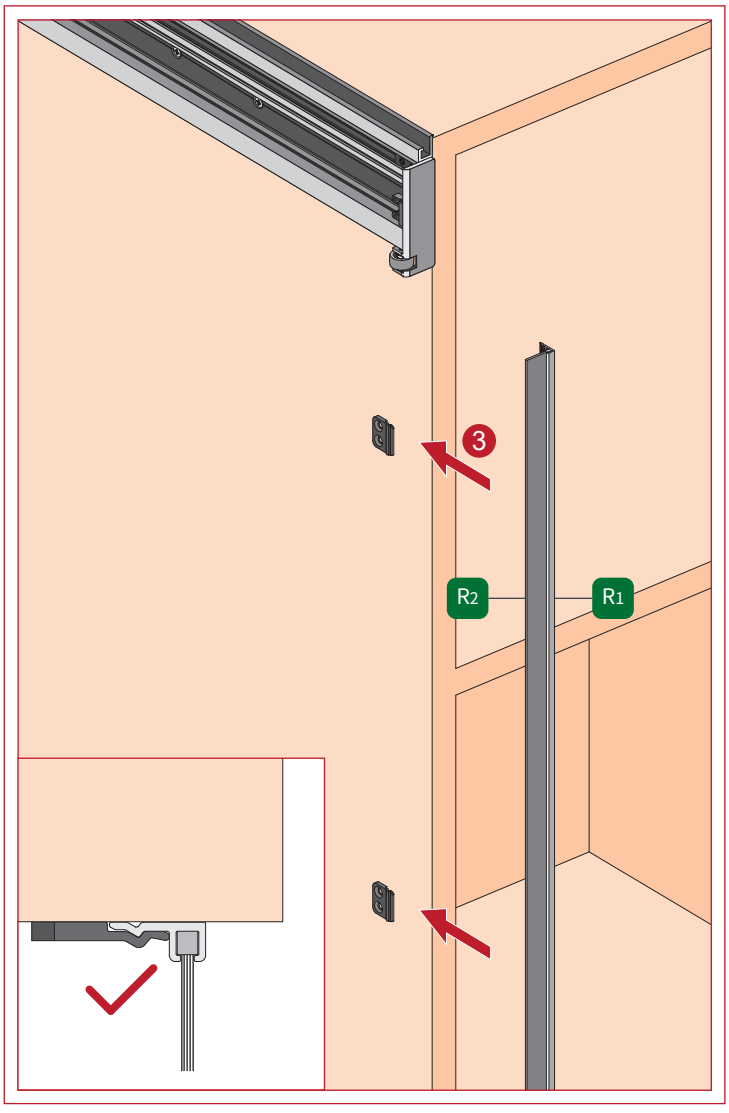

nikpol

7 Install the door panel

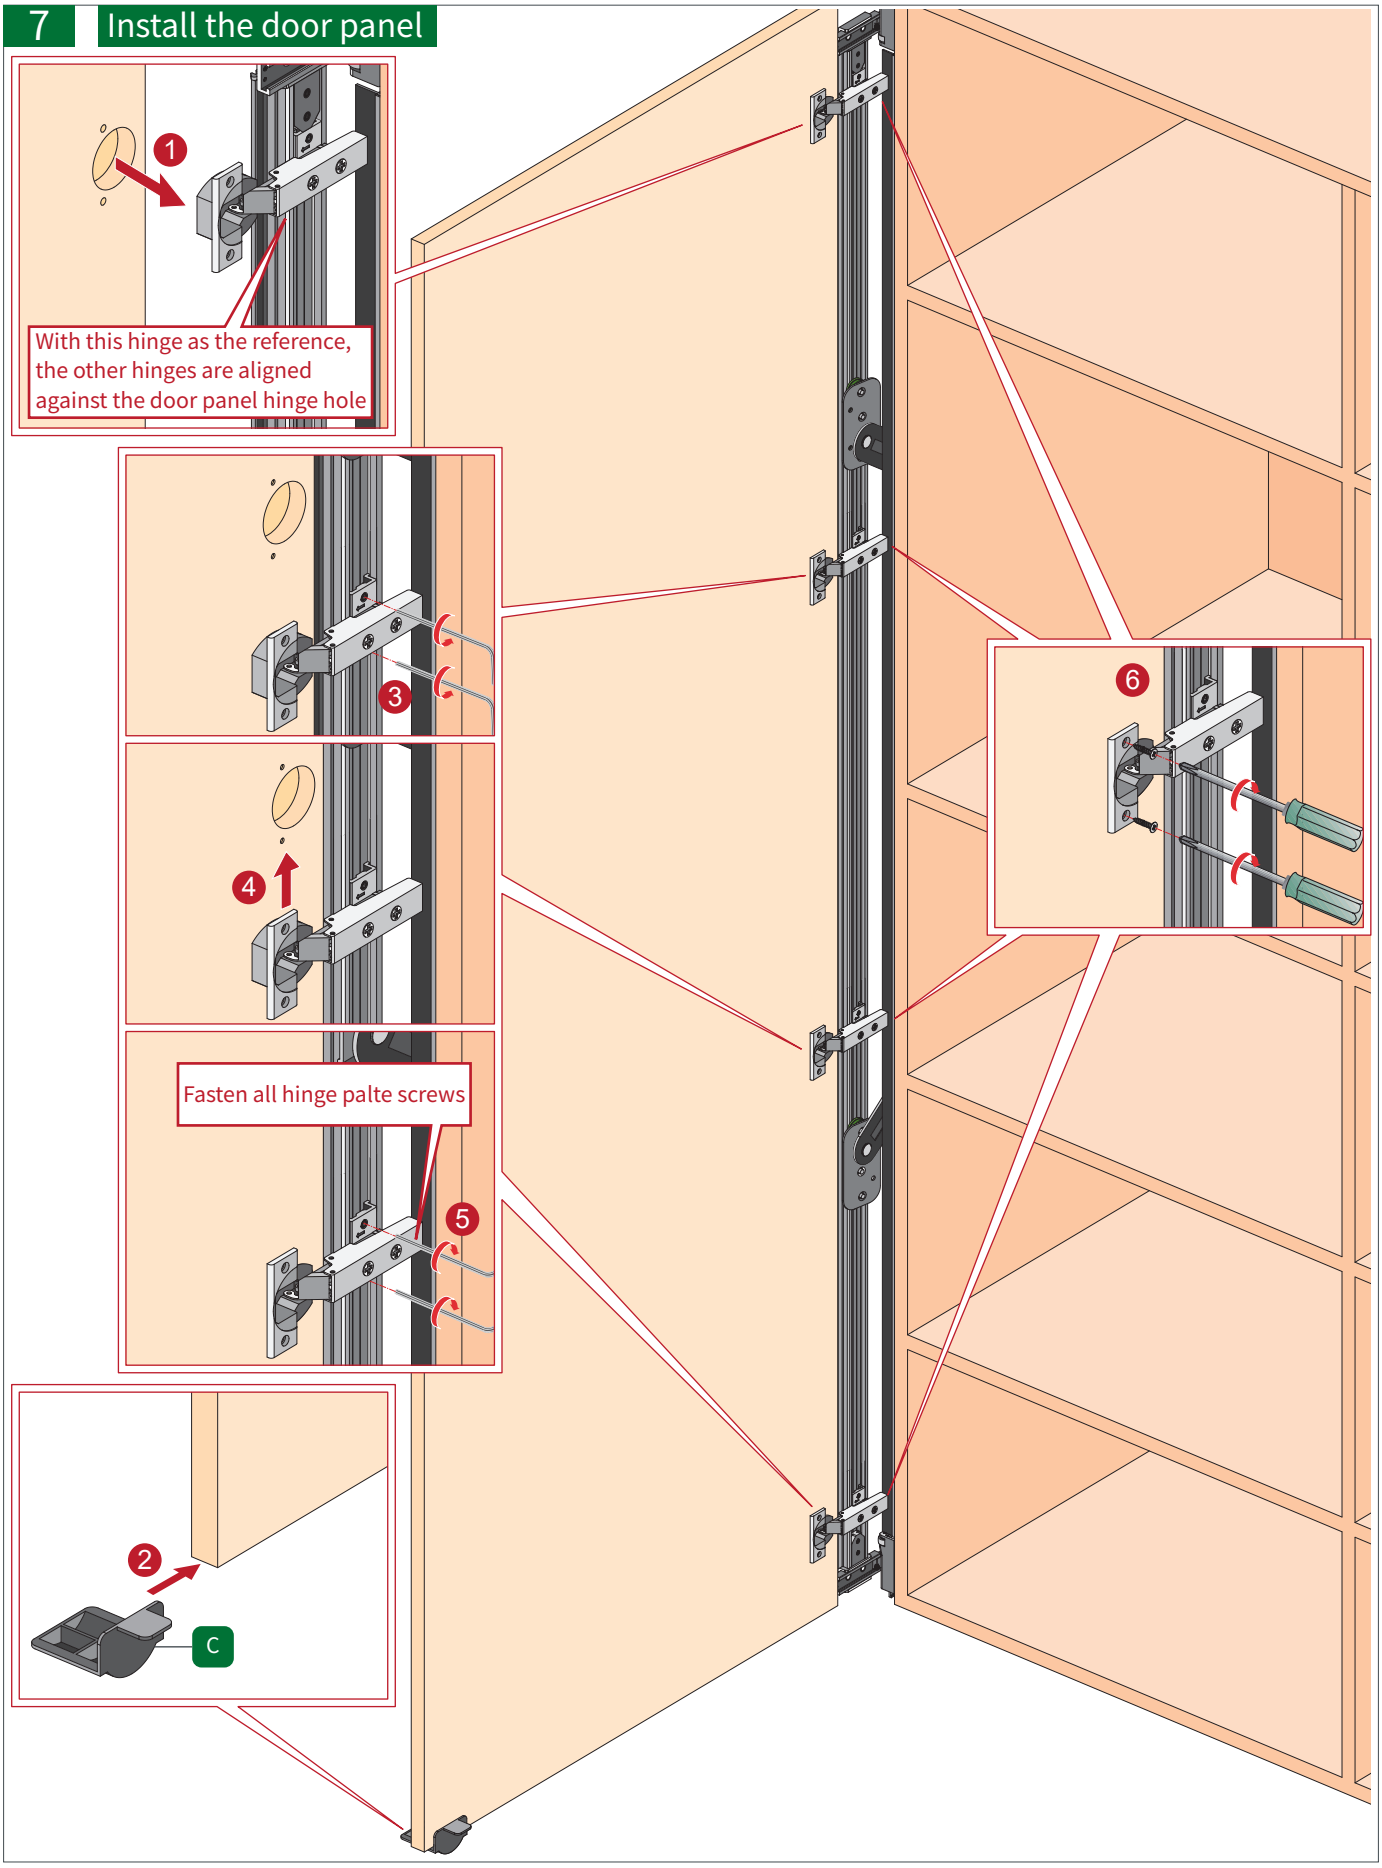

nikpol

9 Adjust the door panel

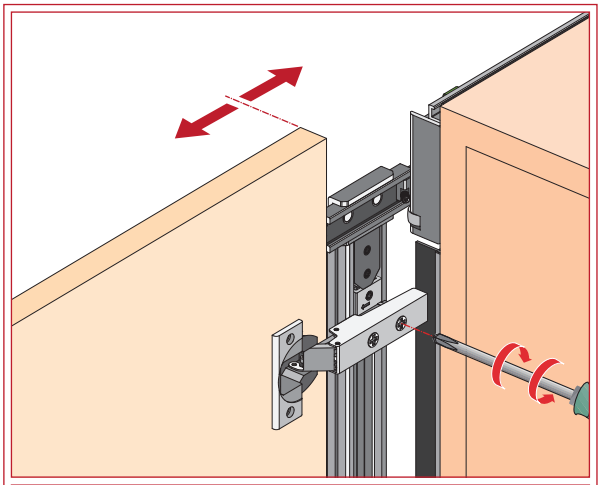

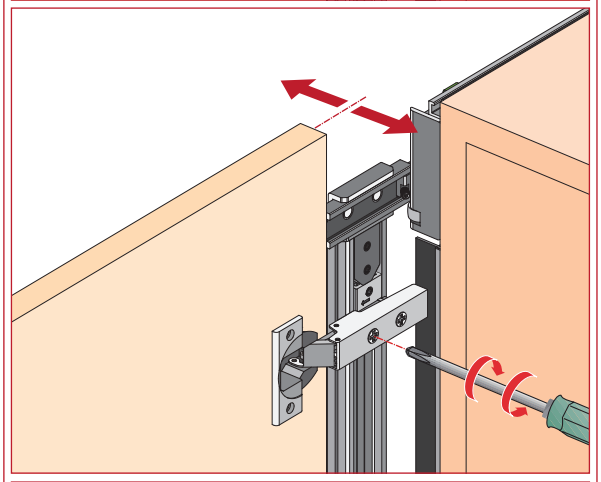

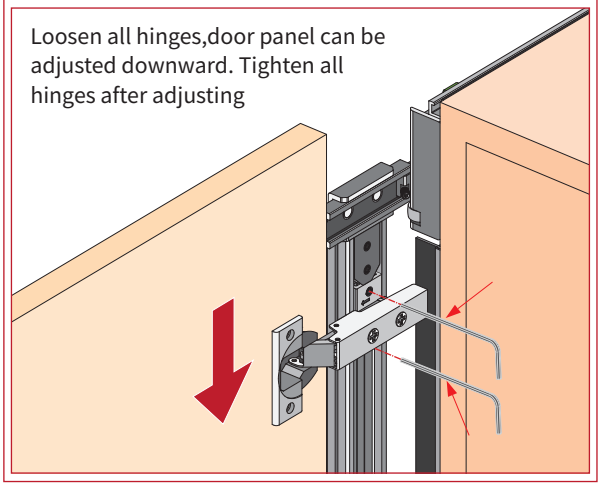

Loosen all hinges,door panel can be adjusted downward. Tighten all hinges after adjusting

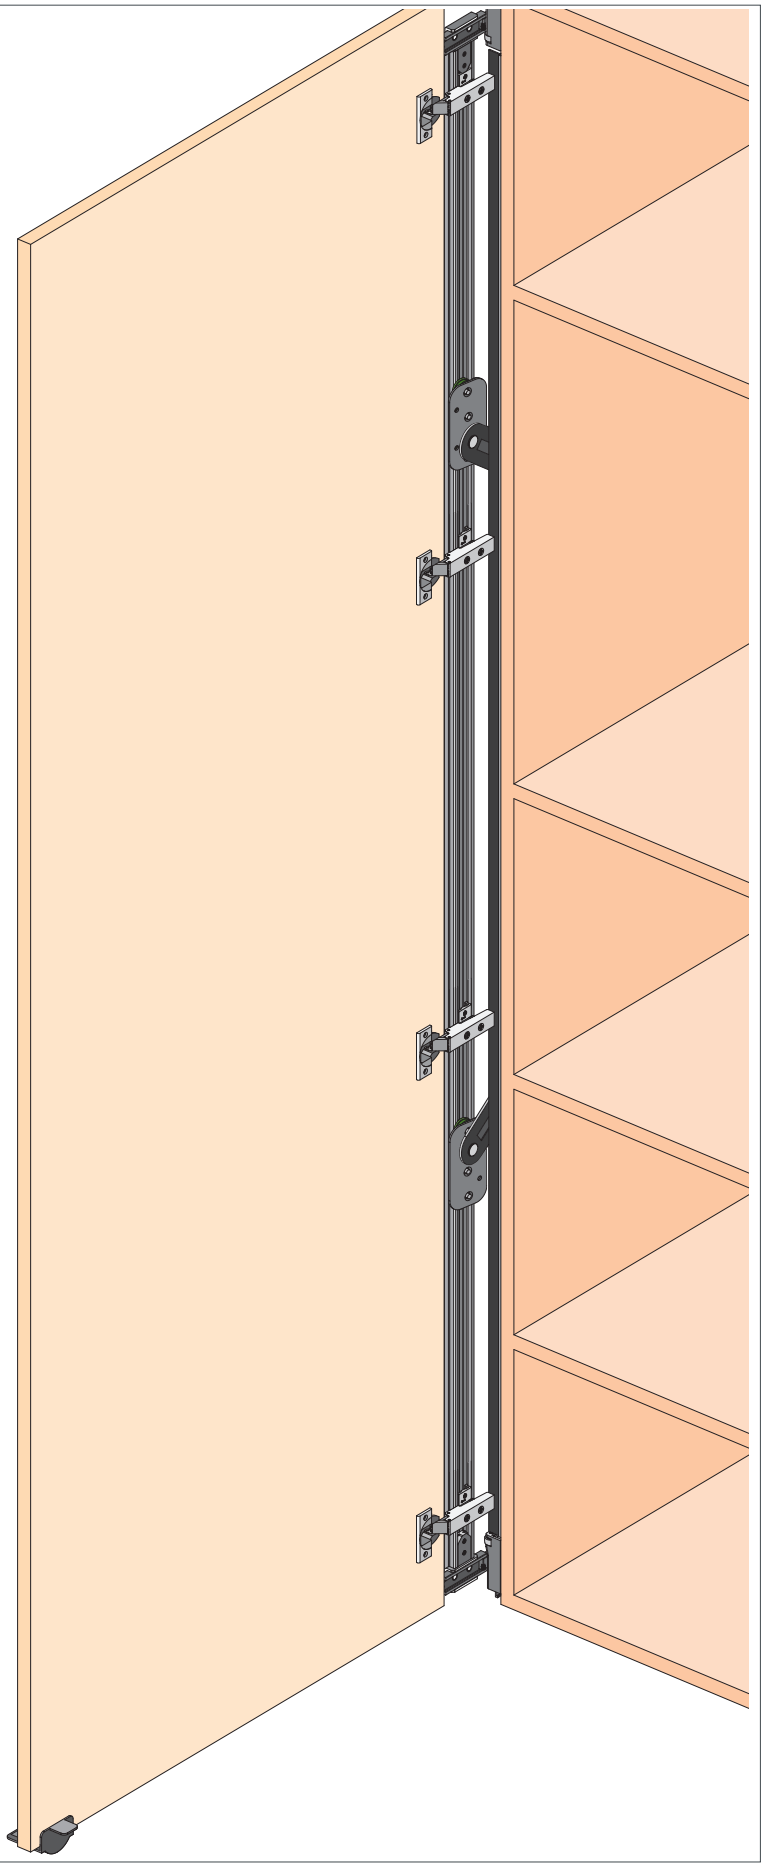

nikpol

10 Promote the door panel

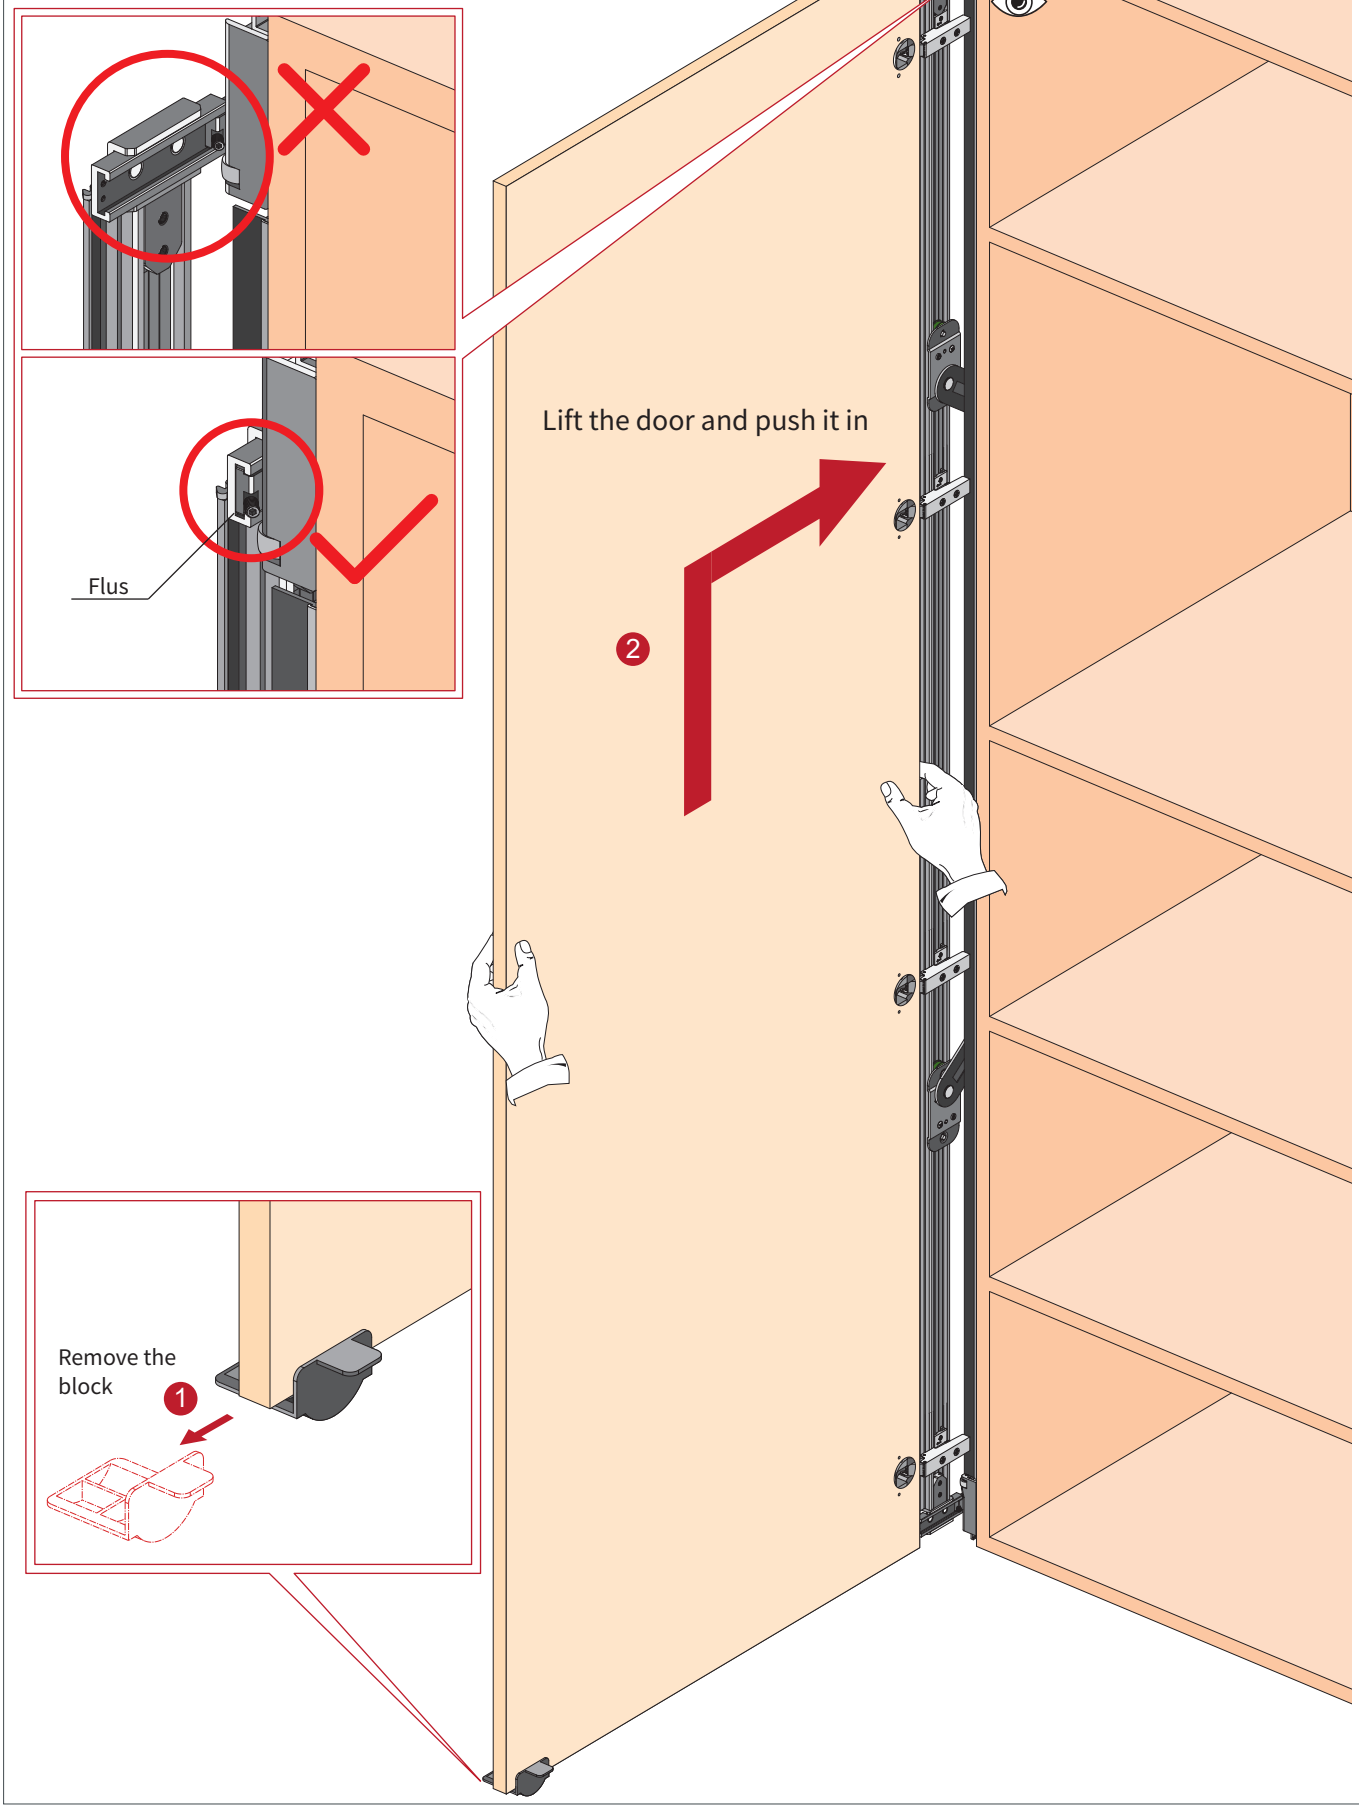

nikpol

11 Install the tensioner

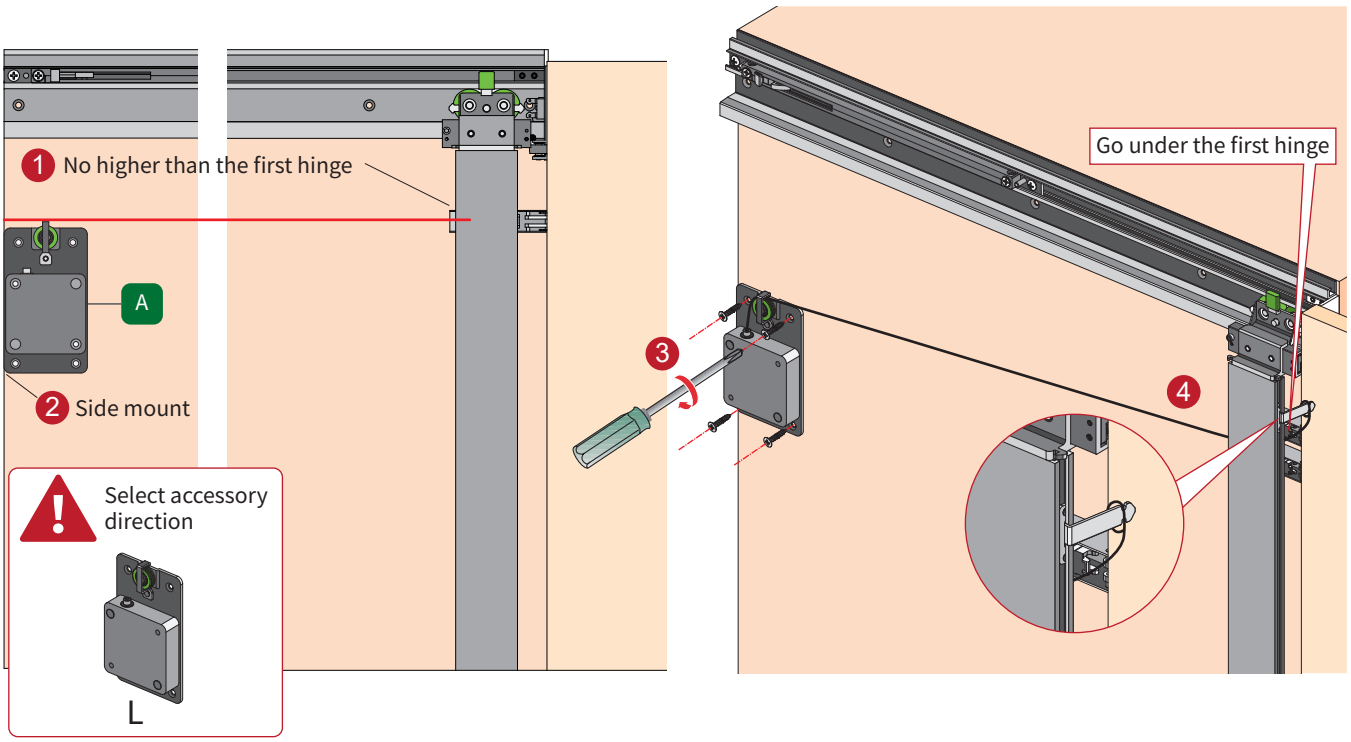

12 Install the stopper

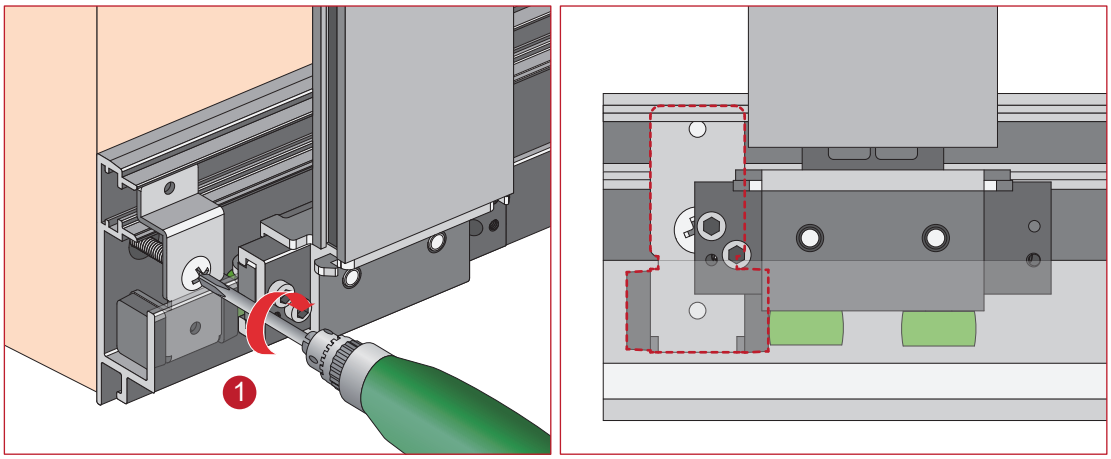

nikpol

13 Install sealing board

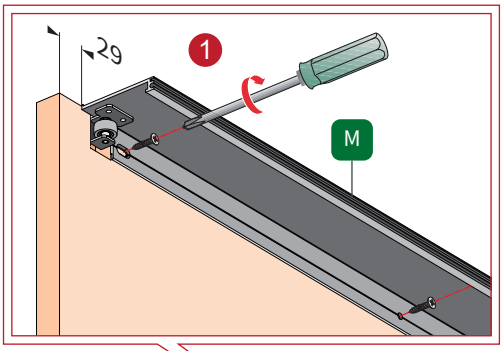



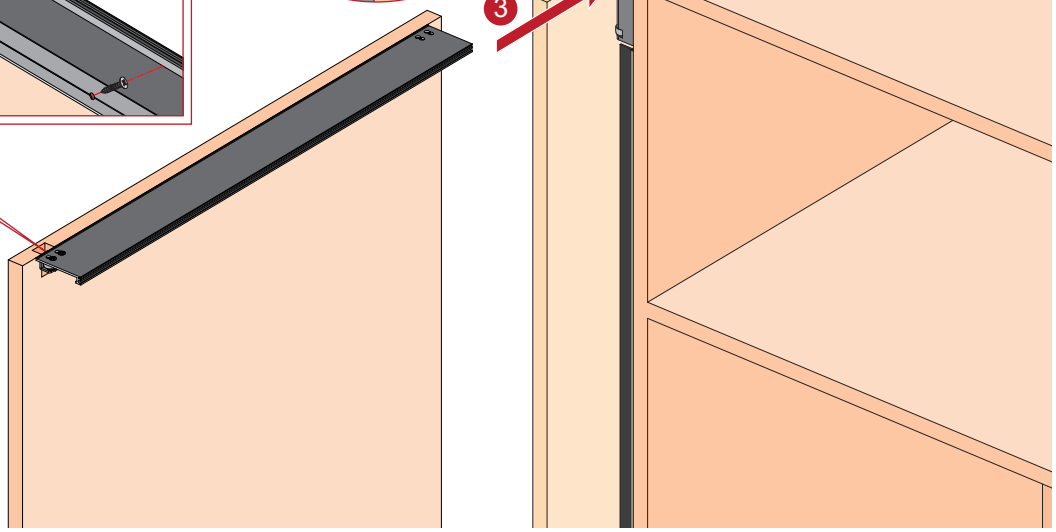





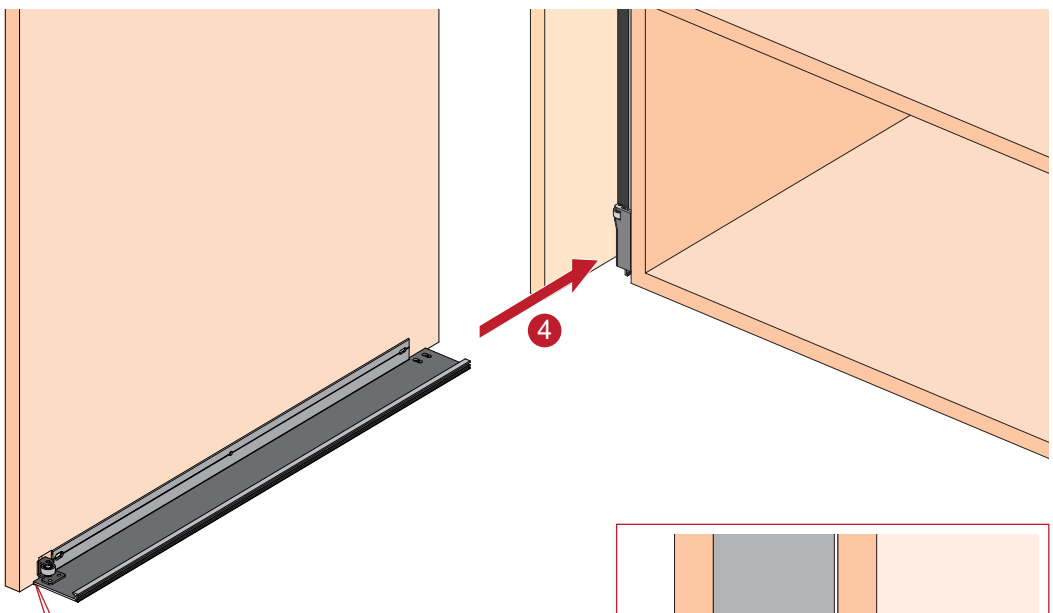

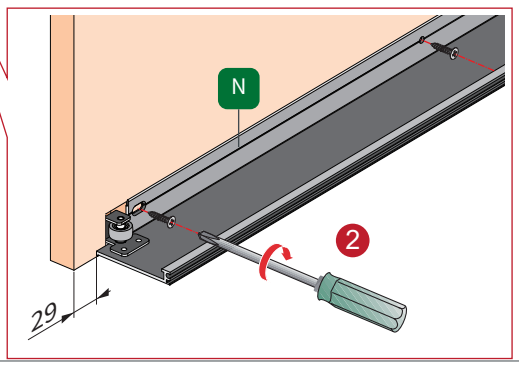

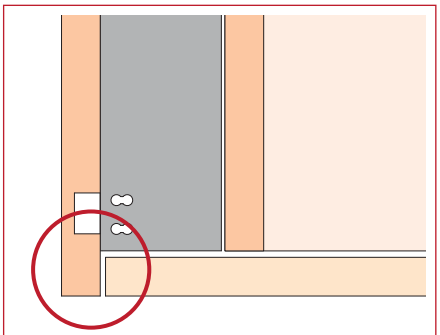

5 Close the door panel, to check if the sealing board is flush with door panel

nikpol

14 Fixed sealing board & mounting decorative cover

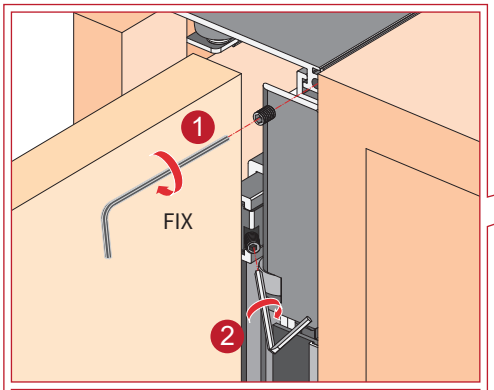

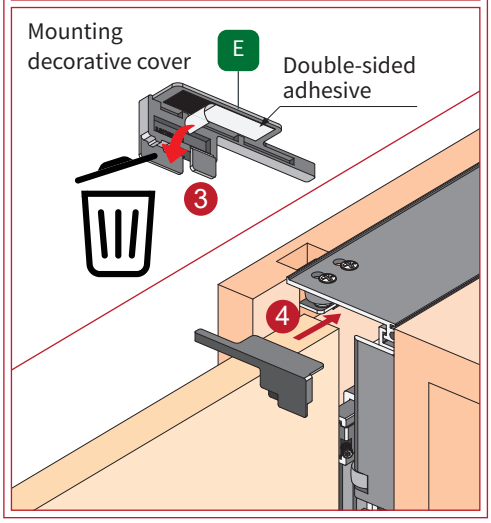

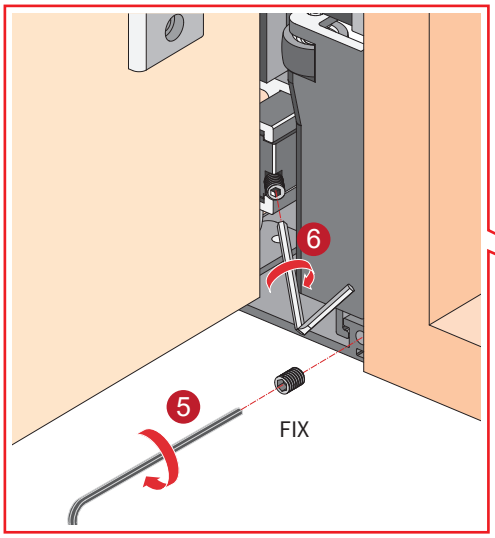

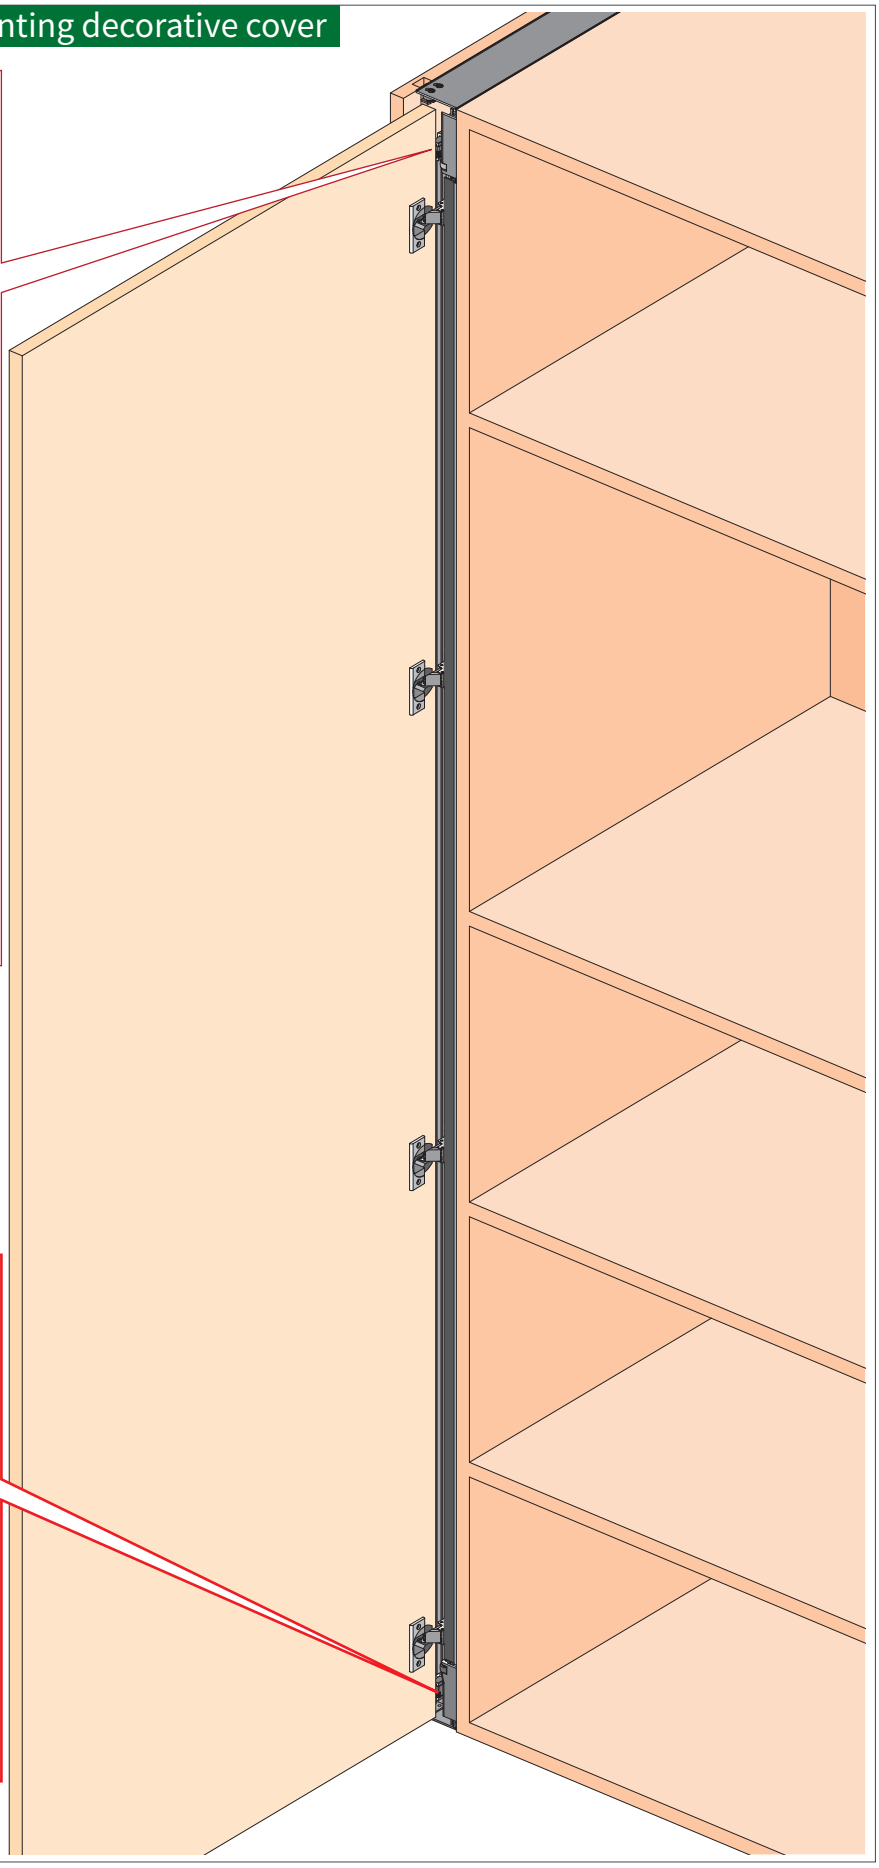

Tips:Since our products will be upgraded from time to time, the product style, color,accessories and related parameters in this document are for reference only. It may change without prior notice, please take real product as criterion.